




Rugged. Reliable. Respected.

- 228 CU YD/HR PRODUCTION*
- LOW MAINTENANCE COSTS
- HIGH QUALITY CONCRETE
- CONSISTENT BATCHES

- FAST SETUP / TEARDOWN
- UNITIZED CONSTRUCTION
- STANDARD COMPONENTS
- DEPENDABLE OPERATION
- The ERIE MCG-11T brings high plant production to all of your mobile ready mix requirements.
- The rugged, single piece mobile design allows quick setup and same day operations.
- Plant operation personnel find all components quickly accessible and easily maintained.
- Ready mix producers count on the MCG-11T for the challenges of a competitive mobile market.



The *ERIE MCG-11T* is the right plant for concrete projects & ready mix operations. Sustained production rates over 200 cu yds per hour come in a single mobile travel unit which can quickly be towed to and erected at any jobsite. Reduced maintenance costs provide less down time and greater profitability. The *MCG-11T* is the right choice for producers who expect reliability and longevity to come in one package.

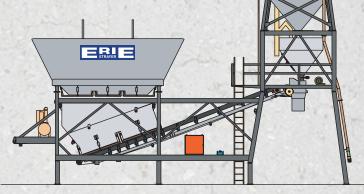

STANDARD CONFIGURATION**

- · Single mobile travel unit
- 20 cubic yard, 3 compartment aggregate bin
- 12 cubic yard aggregate and cement batcher
- Load cell scale system with stainless steel summing box
- Silent rotary turbine vibrators
- Test weight hangers
- · Cement silo and batcher aeration system
- 30" batch transfer conveyor
- · 20 HP Dodge TXT 415 shaft mount reducer
- . 500 bbl single compartment cement silo
- 4" air loading pipe
- Truck charging chute
- 3" Badger electronic water meter
- 10 HP Ingersoll-Rand air compressor
- UL / CSA certified plant motor control panel
- · Factory wiring, piping, and plumbing
- Manual control panel
 - **Consult factory for complete listing
 - *Estimated production based on industry standards; consult factory for details

OPTIONAL FEATURES**

• 50, 80, 100, and 150 cubic yard aggregate bins

=RI=

- 2 − 8 aggregate bin compartments
- AR-400 steel and Erithane bin and batcher liners
- 36" batch transfer conveyors
- 600 bbl cement silos
- · 2 compartment silo with double wall divider
- · Additional 4" and 5" air loading pipes
- · Internal cement silo dust ducts
- 290, 500, and 600 bbl cement silos
- 10" and 12" scew conveyors
- 3" dust return line
- Electromagnetic flowmeter
- 15-30 HP air compressors
- 4 1/2 HP aeration blowers
- Plant maintenance platforms
- · Access ladders and walkways
- ERIE Scout computer control system
- Hydronix Hydro-Probe II microwave moisture system
- · C&W central dust collection and filter vent systems
- Bin charging conveyors
- Aggregate ground hoppers
- · Automatic aggregate handling panel











