

Mustang

**Low Profile,
Portable
Batching Plant**



*Stephens Proudly Supports
The Future of Concrete*



TAKE YOUR OPERATION ON THE ROAD...


WITH THE *NEW*

Mustang Mobile!

14' Travel
Height

DESIGNED STANDARD FOR
SEISMIC ZONE II

400 BBL SILO
30" TRANSFER BELT
70 TON AGG BIN
TWO 10" SCREWS
14' TRAVEL HEIGHT

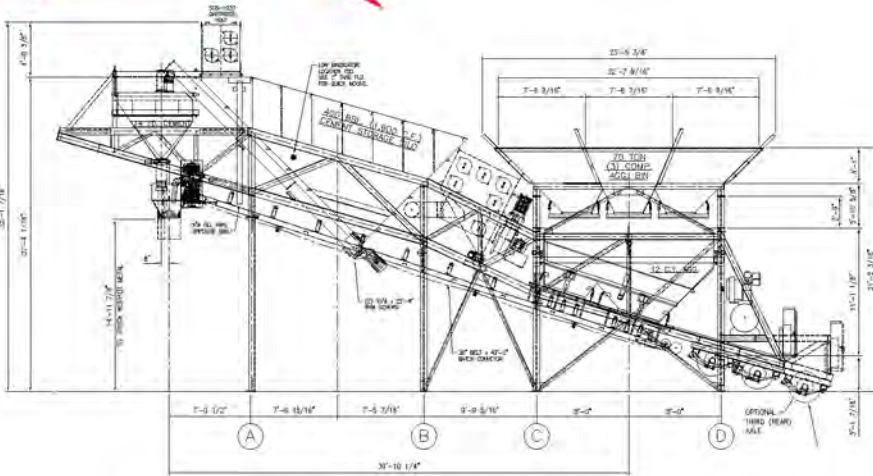


MUSTANG II CONCRETE BATCH PLANT — MAIN ELEVATION
FOR 30" BELT BATCH CONVEYOR & 60" DEEP TRUCK HOPPER

Only Requires
Two Axles for
Standard
Equipment

OPTIONAL CENTRAL DUST COLLECTOR

IMPORTANT TRANSPORTATION NOTE:

THE THIRD (REAR) AXLE IS REQUIRED IF ANY OPTIONS ARE INCLUDED OTHER THAN AN SV-20 BATCHER VENT, THE THIRD (REAR) AXLE, WHEN APPLICABLE, MUST BE REMOVED PRIOR TO PLANT SET-UP TO ALLOW PROPER GROUND CLEARANCES.

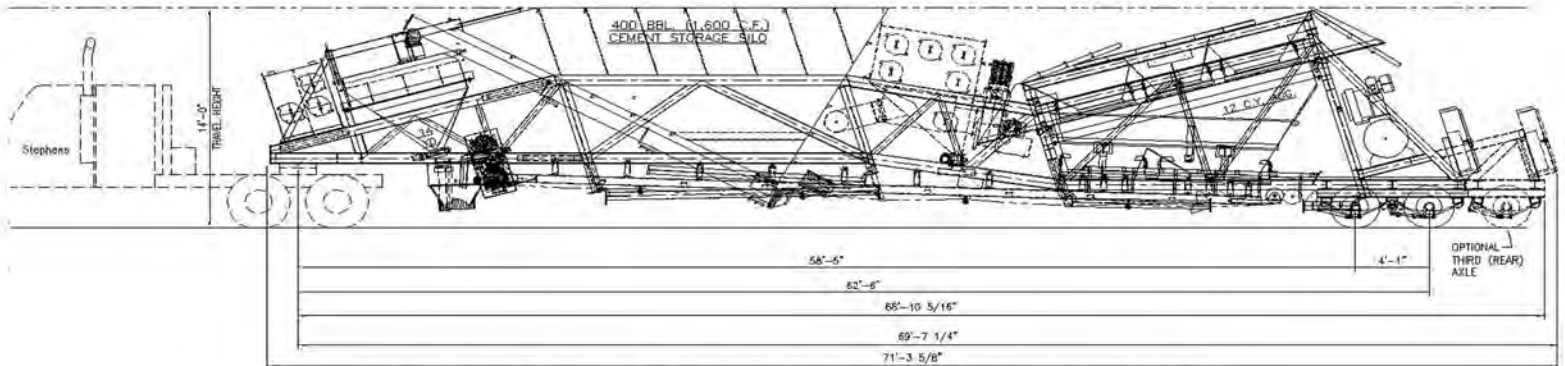

MUSTANG CONCRETE BATCH PLANT — TOWING ARRANGEMENT
FOR 30" BELT BATCH CONVEYOR & 60" DEEP TRUCK HOPPER

SPECS

- 150 yds. per hour • 12 yd. Mustang Plant • 14 yd. Cement Batcher (144 cu. ft.)
- 12 yd. Agg Batcher (575 cu. ft.) • 3" Water Meter • 10 HP 120 Gallon Compressor
- Plant Power Panel w/ 200 Amp Disconnect (3rd Party UL Approved)



Jamieson Equipment Company
www.jamiesonequipment.com
toll free 800.875.0280