


“Top Mount” Telescopers[®] Take up Frames

- All of the Advantages of the Bryant Telescoper[®] with the Convenience of a Bearing Mount “Over the Tube”
- Adjusting Rod Protected from Material Build-up, Rust, Corrosion, or Thread Damage
- Built-in Lubricant Reservoir for Tough Applications
- Guaranteed for 2-5 years in any Operating Environment

True “Protected Screw” Heavy Duty Design (Adjusting Screw is Fully Protected Within the Telescoping Tubes)

- Three Sizes Cover the Range of Applications
350TM
400TM
500TM
- 1-3/4" to 6" Bearing Bore Range
(Larger Sizes Available Upon Request)
- Standard Travel Lengths From 9" to 36"
(Longer Lengths Available Upon Request)

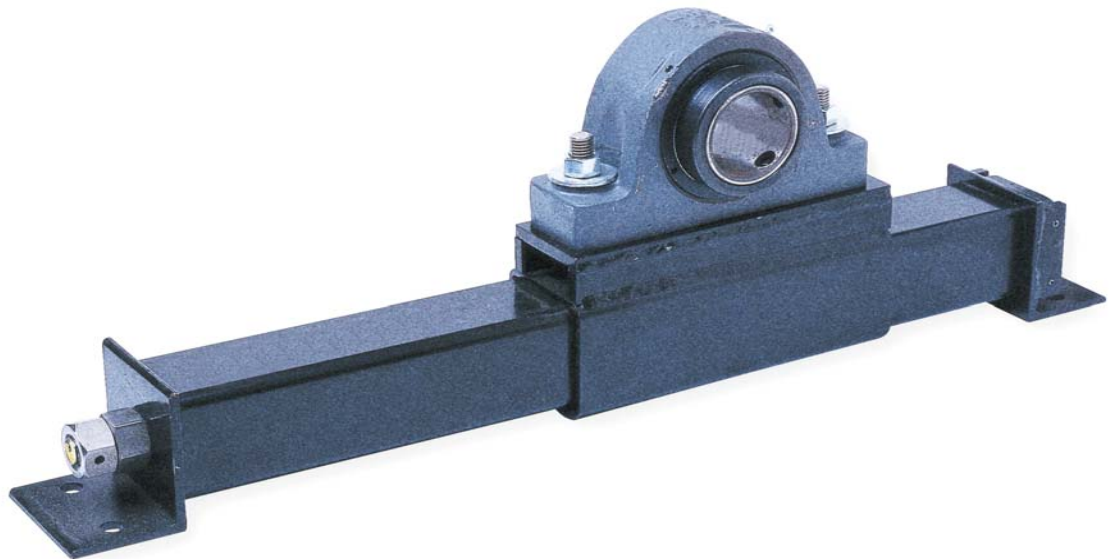

UNIT DIMENSIONS:				TUBE SIZES			ADJUSTER ROD SIZES
MODEL	PART NO.	A	B	TB	TS1	TS2	
350TM-9-MS-SF-BP	57012	28.75	26.00	3.00	3.50	2.50	.875-6 ACME
350TM-12-MS-SF-BP	57000	31.75	29.00	3.00	3.50	2.50	
350TM-18-MS-SF-BP	57001	37.75	35.00	3.00	3.50	2.50	
350TM-24-MS-SF-BP	57002	43.75	41.00	3.00	3.50	2.50	
350TM-30-MS-SF-BP	57003	49.75	47.00	3.00	3.50	2.50	
350TM-36-MS-SF-BP	57013	55.75	53.00	3.00	3.50	2.50	.875-6 ACME
400TM-9-MS-SF-BP	57014	34.25	31.50	3.50	4.00	2.75	1.250-5 ACME
400TM-12-MS-SF-BP	57004	37.25	34.50	3.50	4.00	2.75	
400TM-18-MS-SF-BP	57005	43.25	40.50	3.50	4.00	2.75	
400TM-24-MS-SF-BP	57006	49.25	46.50	3.50	4.00	2.75	1.250-5 ACME
400TM-30-MS-SF-BP	57007	55.25	52.50	3.50	4.00	2.75	1.250-5 ACME
400TM-36-MS-SF-BP	57015	61.25	58.50	3.50	4.00	2.75	
500TM-9-MS-SF-BP	57016	51.75	46.75	6.00	7.00	5.00	2.250-4 ACME
500TM-12-MS-SF-BP	57008	54.75	49.75	6.00	7.00	5.00	
500TM-18-MS-SF-BP	57009	60.75	55.75	6.00	7.00	5.00	2.250-4 ACME
500TM-24-MS-SF-BP	57010	66.75	61.75	6.00	7.00	5.00	
500TM-30-MS-SF-BP	57011	72.75	67.75	6.00	7.00	5.00	2.250-4 ACME
500TM-36-MS-SF-BP	57017	78.75	73.75	6.00	7.00	5.00	

MODEL	MOUNTING DIMENSIONS:									
	FA	FB	FC	FD	FE	FF	FG	FH	FJ	FK
350TM	3.00	1.63	4.00	2.50	0.75	0.75	2.00	4.00	5.25	1.24
400TM	3.50	2.13	5.00	3.00	1.00	0.88	2.82	5.00	6.50	1.36
500TM	6.00	3.50	7.50	5.00	1.25	0.88	4.25	8.00	9.93	1.76

BEARING PLATE DIMENSIONS:				
BA	BB	BC	BD	BE
10.00	8.69	5.56	0.69	1.75
14.00	11.75	8.50	1.00	2.00
22.00	per customer specifications			

