





RLPCBC-60 Single Point, Stainless Steel NTEP 1:5000 Class III Single Cell, Hermetically Sealed IP69K

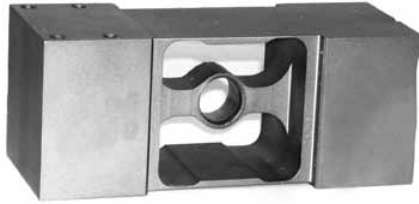

Picture is a representation of actual product

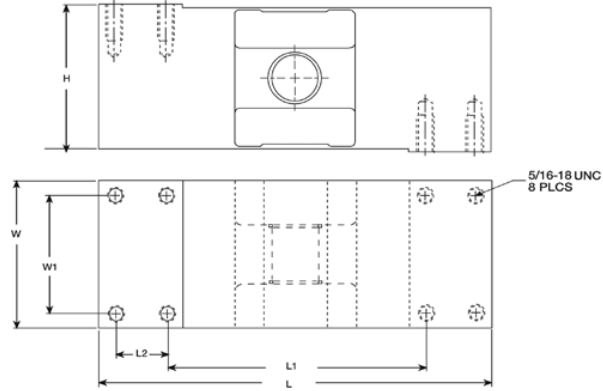

SPECIFICATIONS

Full Scale Output: 2 mv/v	Safe Sideload: 100% Full scale	Cable Diameter: .196 polyurethane jacket	Max Platform Size: 24 in x 24 in
Output Resistance: 960 ohms, nominal +/- 50	Rated Excitation: 10V DC	Cable Color Code: Green.....+ Excitation Black.....- Excitation White.....+ Signal Red.....- Signal Yellow..... Shield Blue.....+ Sense Brown.....- Sense	Warranty: Two-year limited warranty
Input Resistance: 1100 ohms +/- 50	Total Error: 0.020% Full scale	Approvals:  	
1100 ohms +/- 50 Material/Finish: Stainless steel	Insulation Resistance: 5000 megohms		
Temperature: 14° F to 104° F/ -10° C to 40° C	Seal Type: Hermetically sealed, IP69K		
Safe Overload: 200% Full scale	Cable Length: 10 ft/3 m		

DIMENSIONS

RATED CAPACITY	L	L1	L2	W	W1	H
kg/mm						
50-1000	190.5	107	35	73.7	50	73.7
lb/inches						
110.3-2205	7.50	4.21	1.38	2.90	1.97	2.90

ORDER INFORMATION

LOAD RATING		PART #	PRICE
50 kg	(110.3 lb)	87022	Consult
100 kg	(220.5 lb)	87023	Consult
250 kg	(551.3 lb)	87024	Consult
500 kg	(1,102.5 lb)	87025	Consult
1000 kg	(2,205 lb)	87026	Consult

RICE LAKE WEIGHING SYSTEMS