




# "L" Style Vacuum Filters ISO CSL Series NW16 - NW40 Flg

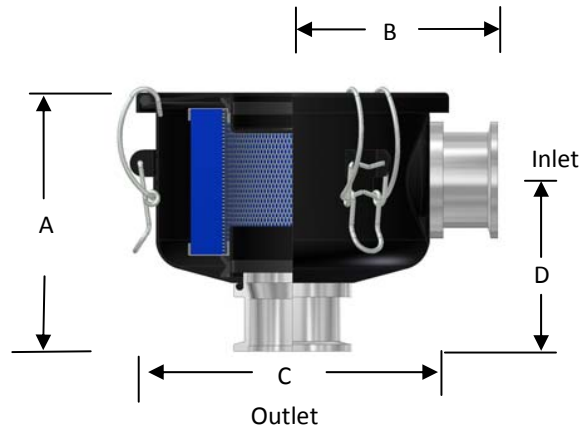

## Features

- ISO flange stainless steel connections
- Rugged steel construction with baked enamel finish
- Stainless steel torsion clips for durability
- Positive engagement O-ring seal system
- Seamless drawn housings

## Technical Specifications

- Vacuum Leak Rate:  $1 \times 10^{-5}$  mbar l/sec
- Temp (continuous): min -26°C (-15°F) max 104°C (220°F)
- Filter change out differential: 380-500 +mm H<sub>2</sub>O over initial  $\Delta P$
- Polyester: 99%+ removal efficiency standard to 5 micron
- Paper: 99%+ removal efficiency standard to 2 micron

## Series Specific Applications

- Prevent dry scroll tip seal migration
- Polycrystalline silicone ingot production
- Vacuum coating
- Solar cell lamination
- Trap condensable vapors
- Thin-film manufacturing
- Protect against backstreaming (Foreline Trap)

## Options (Inquires Encouraged)

- Contact factory for larger sizes
- ATEX certification
- Viton seals
- Electroless nickel finish
- Stainless steel



Electroless Nickel Finish

## ISO Flange Outlet Connections

ISO Flg Inlet & Outlet	Assembly SCFM Rating	Assembly Part Number		Dimensions - inches				Approx. Weight lbs.	Replacement Element Part No.		Element SCFM Rating
		Polyester	Paper	A	B	C	D		Polyester	Paper	
NW16	23	CSL-825-NW16B	CSL-824-NW16B	3 7/8	2 5/8	3 3/4	2 1/4	0.88	825	824	25
NW25	25	CSL-825-NW25B	CSL-824-NW25B	3 7/8	2 5/8	3 3/4	2 1/4	0.88	825	824	25
NW25	35	CSL-843-NW25B	CSL-842-NW25B	4 3/8	3 3/8	5 3/4	2 3/4	3	843	842	55
NW40	55	CSL-843-NW40B	CSL-842-NW40B	4 3/8	3 3/8	5 3/4	2 3/4	3	843	842	55
NW40	80	CSL-849-NW40B	CSL-848-NW40B	7 3/16	4 5/8	7 3/8	5	5	849	848	115

See Vacuum Filter Technical Data section for sizing guidelines.

Dimension tolerance  $\pm 1/4"$

Note: Model offerings and design parameters may change without notice.

