




Side Channel Blower Silencers SLCR/SLCRT Series 1/2" - 4"

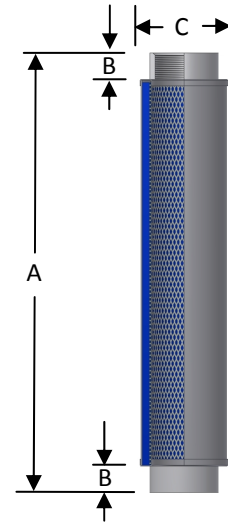

Filter Silencers

Features

- Layered sound absorbent media
- Designed for minimal pressure drop; baffles, internal tubes, and other restrictive devices are unnecessary
- For inlet and discharge inline air service (See temp specs.)
- Durable carbon steel construction with powder coat finish

Technical Specifications

- Max. Temperature (continuous): 275°F (135°C)
- Due to the wide range of equipment and environments; please contact factory for typical noise attenuation for your application.

Options

- Flange adapters
- Larger sizes
- Special connections


Inlet/Outlet Connections

FPT Inlet/Outlet	Assembly SCFM Rating	Part Number	Dimensions - inches			Approx. Wt. lbs.
			A	B	C	
1"	42	SLCR100	12	11/16	2 1/2	2
1 1/4"	55	SLCR125	12	11/16	2 1/2	2
1 1/2"	155	SLCR150	12	11/16	2 5/8	3
2"	270	SLCR200	15 3/4	11/16	3 5/8	4
2 1/2"	385	SLCR250	21	1 1/2	4 5/8	8
3"	575	SLCR300	26	1 9/16	5 1/8	10
4"	575	SLCR400	24 11/16	1 11/16	10	26

MPT Inlet/Outlet	Assembly SCFM Rating	Part Number	Dimensions - inches			Approx. Wt. lbs.
			A	B	C	
1/2"	25	SLCRT050	13 7/8	2	2 1/2	2
3/4"	35	SLCRT075	14 1/2	2	2 1/2	2
1"	42	SLCRT100	14 1/2	2	2 1/2	2
1 1/4"	55	SLCRT125	14 1/2	2	2 1/2	2
1 1/2"	155	SLCRT150	14	1 3/4	2 5/8	3
2"	270	SLCRT200	18 1/2	2 1/8	3 5/8	4
2 1/2"	385	SLCRT250	23 11/16	2 5/8	4 5/8	8
3"	575	SLCRT300	28	2 5/8	5 1/8	10
4"	575	SLCRT400	29 5/16	4	10	26

Dimensions provided are for reference purposes only. Contact

Typical Noise Attenuation

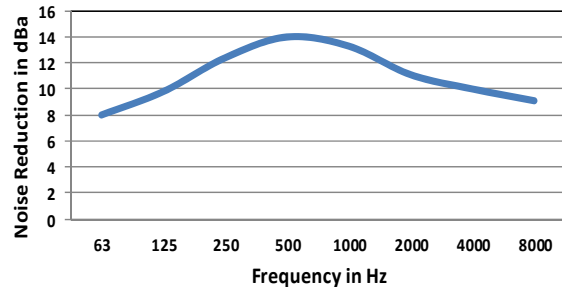

- Noise attenuation may vary due to the wide range of applications and machines

