Stephens (*) PONY EXPRESS









Stephens Proudly Supports The Future of Concrete



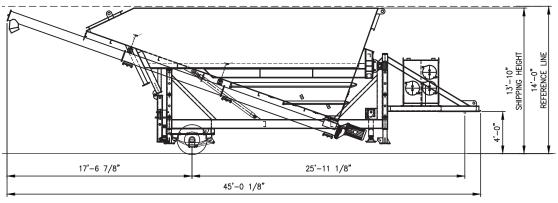

PONY EXPRESS: SHIPPING LAYOUT

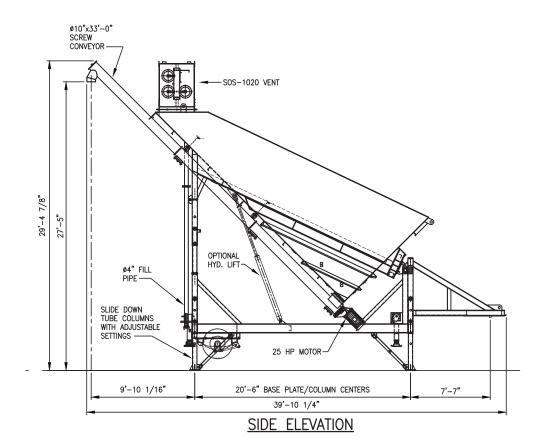

STANDARD EQUIPMENT

- 412 BBL 1648 CUBIC FEET
- 4" DIAMETER FILL LINE
- SV-265 SILO FILTER VENT
- HI AND LOW LEVEL INDICATORS IN SILO
- FOUR MECHANICAL LEVELING JACKS
- ONE SINGLE AXLE TRANSPORTATION SYSTEM
- 8" x 33' SPLINE DRIVE SCREW CONVEYOR

OPTIONAL

- LARGER SCREW CONVEYORS 10" & 12"
- LARGER SILO DUST COLLECTORS (SOS-1020 CARTRIDGE VENT)
- LOW PRESSURE AERATION BLOWER (STRONGLY RECOMMENDED)
- GAS & ELECTRIC HYDRAULIC PACKAGES FOR SELF ERECTING

