

Radial Stacking Conveyor

Time Tested, Field Proven Stacking Conveyors

Limitless Range

We set the industry standard with more sizes available than any other conveyor builder.



Rugged Design

Our robust manufacturing withstands rough environments common to portable equipment.



Units
Up To

3,000
TPH

Guaranteed Durability

Pound for pound and dollar for dollar, you can't find a longer-lasting brand of conveyors.

5,000

Portable Stackers
Built To Date



5-year

Structural
Warranty

On-board Power



Equip with a diesel engine for a self-powered stacking conveyor.

Stacker Experience

Since our beginning, we have manufactured almost 5,000 portable stacking conveyors.

2-year


Complete
Conveyor
Warranty



Featured Superior Brand Conveyor Accessory:


As North America's only combination conveyor system and accessories manufacturer, we're never held back by our idler vendors because we are the idler vendor.

Stockpile Dimensions

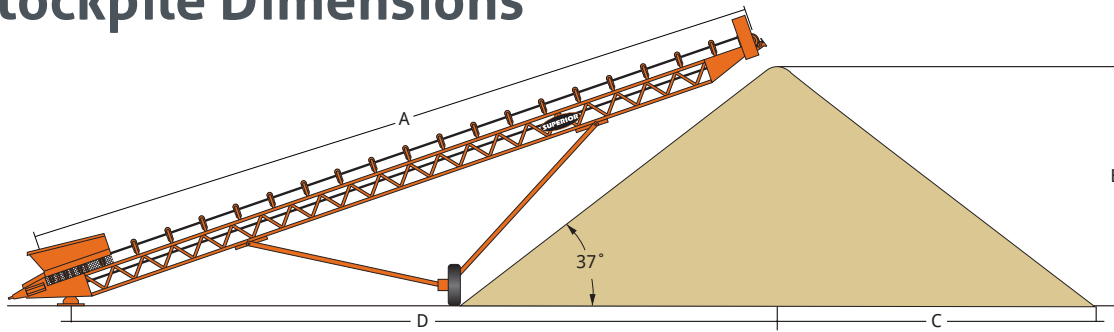


Conveyor Length	A	40'	50'	60'	70'	80'	90'	95'	100'	110'	125'	150'
Stockpile Height	B	13'-6"	16'-5"	19'-4"	22'-9"	26'-4"	29'-9"	31'-0"	31'-9"	35'-2"	39'-3"	46'-4"
Radius of Pile	C	19'-0"	23'-0"	27'-0"	30'-5"	36'-6"	39'-9"	41'-4"	42'-9"	47'-0"	55'-4"	61'-10"
Anchor Pivot to Center of Pile	D	39'-3"	47'-10"	57'-6"	67'-3"	76'-5"	86'-0"	90'-6"	95'-3"	104'-6"	119'-0"	143'-4"

Operating Dimensions

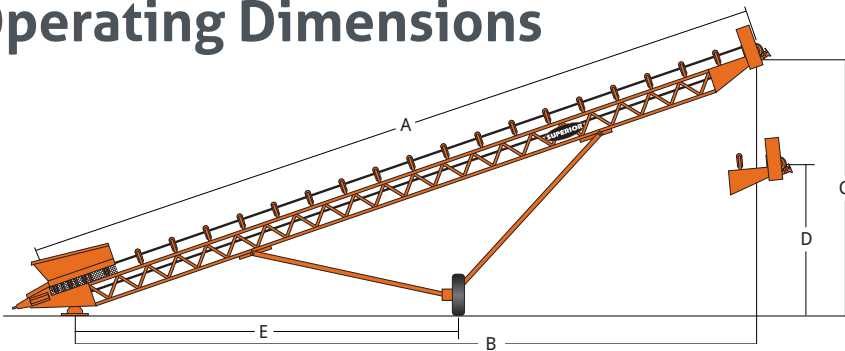

Conveyor Length	A	40'	50'	60'	70'	80'	90'	95'	100'	110'	125'	150'
Conveyor Ground Length	B	36'-2"	45'-8"	55'-2"	64'-7"	74'-0"	85'-0"	89'-0"	93'-0"	102'-0"	116'-6"	140'-4"
Fully Raised Height to Center of Pulley	C	14'-5"	17'-11"	21'-0"	24'-5"	28'-1"	29'-5"	33'-0"	33'-8"	36'-0"	40'-8"	47'-11"
Lowered Height to Center of Pulley	D	11'-6"	12'-5"	12'-5"	15'-0"	14'-1"	14'-3"	14'-6"	14'-7"	16'-10"	17'-6"	18'-0"
Anchor Pivot to Center of Axle	E	19'-9"	25'-5"	31'-2"	36'-4"	40'-11"	45'-0"	47'-9"	51'-4"	55'-3"	60'-4"	79'-5"

Transport Dimensions

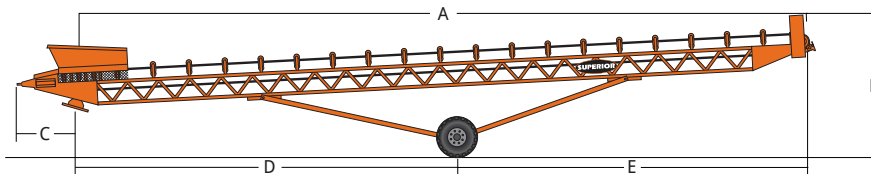

Conveyor Length		40'	50'	60'	70'	80'	90'	95'	100'	110'	125'	150'
Travel Length	A	43'-10"	49'-5"	59'-5"	69'-3"	63'-7"	68'-8"	73'-3"	78'-8"	60'-4"	68'-2"	80'-6"
Travel Height	B	12'-7"	11'-8"	11'-10"	12'-8"	14'-1"	13'-8"	13'-10"	14'-0"	13'-9"	13'-10"	14'-0"
Tail to Kingpin	C	5'-1"	5'-2"	5'-2"	5'-2"	5'-2"	5'-2"	5'-2"	5'-6"	5'-6"	5'-9"	6'-0"
Kingpin to Axle	D	10'-7"	24'-8"	30'-11"	36'-11"	40'-9"	44'-8"	49'-6"	51'-6"	30'-4"	37'-3"	49'-0"
Axle to Head	E	24'-10"	24'-9"	28'-7"	33'-1"	22'-10"	24'-0"	23'-9"	27'-2"	30'-0"	30'-1"	31'-0"

*Length up to 200-ft.