


S Type

263D - Revere Transducers Inc

3 mv/v, 0.05% nonlinearity, 350/350 ohm, 10 ft 4 cond cable, nickel plated steel.


Part Number	Capacity	Weight
263D-D3-3K-10P1	3,000 lb	4 lb



263D

Dimensions in inches

Capacity	A	B	C	T
3K	4.56	4.00	1.50	1/2-20

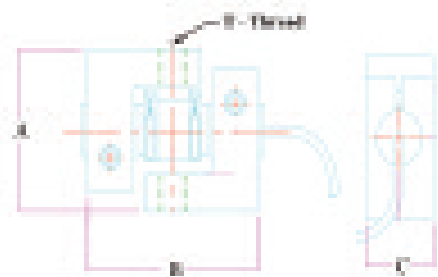

CB - Group Four

Interchangeable with RTI Model 263D. Stainless steel beam. Arms are nickel plated steel.

3 mv/v, 0.05% nonlinearity, 450/350 ohm, 11 ft 4 cond cable, **stainless steel**, IP67.


Part Number	Capacity	Weight
CB-50	50 lb	5 lb
CB-100	100 lb	5 lb
CB-200	200 lb	5 lb
CB-250	250 lb	5 lb
CB-300	300 lb	5 lb
CB-500	500 lb	5 lb
CB-1K	1,000 lb	5 lb
CB-2K	2,000 lb	5 lb
CB-3K	3,000 lb	5 lb



CB

Dimensions in inches

Capacity	A	B	C	T
50-1K	3.00	4.00	1.50	1/2-20
2K-3K	4.56	4.00	1.50	1/2-20

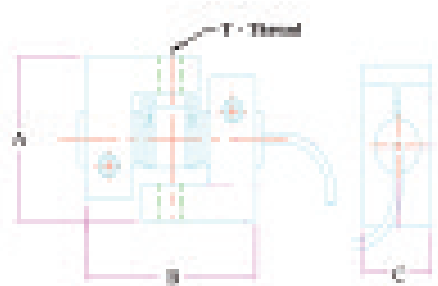


S Type

Suitable for in-line mounting with tension links, rod ends, eyebolts, cables or other means. Can also be used in compression applications. Environmental protection is either clamped neoprene sleeve or elastic sealant which protects the strain gages from high humidity and moisture.



RSC



RSC - HBM Inc

2 mv/v, 0.03% combined error, 385/350 ohm, 25 ft 4 cond cable, **stainless steel**.

FM Approved.


NTEP 91-031 S/M III 3,000 div.

Part Number	Capacity	Weight
RSC-50-25555	50 lb	2 lb
RSC-100-25555	100 lb	2 lb
RSC-200-25555	200 lb	2 lb
RSC-300-25555	300 lb	2 lb
RSC-500-25555	500 lb	3 lb
RSC-750-25555	750 lb	3 lb
RSC-1K-25555	1,000 lb	3 lb
RSC-2K-25555	2,000 lb	3 lb
RSC-3K-25555	3,000 lb	3 lb
RSC-5K-25555	5,000 lb	4 lb
RSC-10K-25100 *	10,000 lb	5 lb


* Not NTEP

Dimensions in inches

Capacity	A	B	C	T
50-200	2.44	2.00	0.60	3/8-24 UNF
300	3.44	2.25	0.95	3/8-24 UNF
500-3K	3.44	2.25	0.95	1/2-20 UNF
5K, 10K	3.94	2.75	1.45	3/4-16 UNF



TS2



TS2 - Totalcomp

2 mv/v, 0.03% combined error, 385/350 ohm, 25 ft 4 cond cable, **stainless steel**.

Part Number	Capacity	Weight
TS2-50-SS	50 lb	2 lb
TS2-100-SS	100 lb	2 lb
TS2-200-SS	200 lb	2 lb
TS2-300-SS	300 lb	2 lb
TS2-500-SS	500 lb	3 lb
TS2-1K-SS	1,000 lb	3 lb
TS2-2K-SS	2,000 lb	3 lb
TS2-3K-SS	3,000 lb	3 lb
TS2-5K-SS	5,000 lb	4 lb

Dimensions in inches

Capacity	A	B	C	T
50-200	2.44	2.00	0.60	3/8-24 UNF
300	3.44	2.25	0.95	3/8-24 UNF
500-3K	3.44	2.25	0.95	1/2-20 UNF
5K, 10K	3.94	2.75	1.45	3/4-16 UNF

S Type


S35 - HBM Inc

FM Approved.

3 mv/v, 0.03% combined error, 350/350 ohm, 20 ft 4 cond cable, **stainless steel**, IP66.

NTEP 97-142 III S 3,000 div & IIIL S 10,000 div


Part Number	Capacity	Weight
S35-100-20575	100 lb	2 lb
S35-200-20575	200 lb	2 lb
S35-300-20575	300 lb	2 lb
S35-500-20575	500 lb	3 lb
S35-750-20575	750 lb	3 lb
S35-1K-20575	1,000 lb	3 lb
S35-1.5K-20575	1,500 lb	3 lb
S35-2K-20575	2,000 lb	3 lb
S35-2.5K-20575	2,500 lb	3 lb
S35-3K-20575	3,000 lb	3 lb
S35-5K-20575	5,000 lb	4 lb
S35-10K-20555	10,000 lb	5 lb
S35-15K-20555	15,000 lb	10 lb
S35-20K-20575	20,000 lb	22 lb

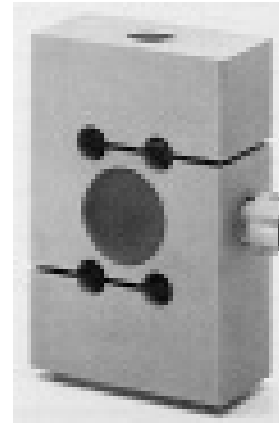


S35

Dimensions in inches

Capacity	A	B	C	T
50-300	2.40	2.00	0.46	1/4-28 UNF
500-1K	2.40	2.00	0.71	1/2-20 UNF
1.5K-2.5K	2.40	2.00	0.96	1/2-20 UNF
3K	3.90	3.00	0.96	1/2-20 UNF
5K-10K	3.90	3.00	0.96	3/4-16 UNF
15K	5.50	4.00	1.50	1-14 UNS
20K	7.00	5.00	2.00	1 1/4-12 UNF

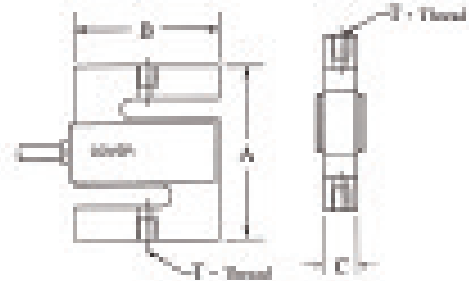

S Type



TS




TS - Totalcomp

Bi-directional for both tension & compression loads.

3 mv/v, 0.03% nonlinearity, 380/350 ohm, 20 ft 4 cond cable, nickel plated steel, IP67.

NTEP 93-028 S/M III 3,000 div & IIIL 10,000 div

Part Number	Capacity	Weight
TS-25	25 lb	2 lb
TS-50	50 lb	2 lb
TS-75	75 lb	2 lb
TS-100	100 lb	2 lb
TS-150	150 lb	2 lb
TS-200	200 lb	2 lb
TS-250	250 lb	2 lb
TS-300	300 lb	2 lb
TS-500	500 lb	2 lb
TS-750	750 lb	2 lb
TS-1K	1,000 lb	2 lb
TS-1.5K	1,500 lb	2 lb
TS-2K	2,000 lb	2 lb
TS-2.5K	2,500 lb	2 lb
TS-3K	3,000 lb	4 lb
TS-5K	5,000 lb	4 lb
TS-10K	10,000 lb	5 lb
TS-15K	15,000 lb	8 lb
TS-20K	20,000 lb	18 lb
TS-30K	30,000 lb	35 lb
TS-40K	40,000 lb	36 lb

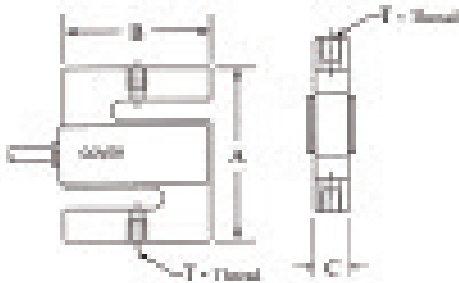

Dimensions in inches

Capacity	A	B	C	T	Aug
25, 200	2.50	2.00	0.75	1/4-28 UNF	
250-300	2.50	2.00	0.75	1/4-28 UNF	
500-2.5K	2.50	2.00	1.00	1/2-20 UNF	
3K	4.00	3.00	1.25	1/2-20 UNF	
5K, 10K	4.00	3.00	1.25	3/4-16 UNF	
15K	5.50	4.00	1.50	1-14 UNF	
20K	7.00	4.50	2.00	1 1/4-12 UNF	
30K, 40K	10.00	5.75	2.75	1 1/2-12 UNF	

S Type

TS-SS - Totalcomp

Bi-directional for both tension & compression loads.
 3 mv/v, 0.03% nonlinearity, 380/350 ohm, 20 ft 4 cond cable, **stainless steel**, IP67.
 NTEP 93-015 S/M III 3,000 div & IIL 10,000 div (100 lb to 10,000 lb).

Part Number	Capacity	Weight
TS-25-SS *	25 lb	2 lb
TS-50-SS *	50 lb	2 lb
TS-100-SS	100 lb	2 lb
TS-200-SS	200 lb	2 lb
TS-250-SS *	250 lb	2 lb
TS-300-SS	300 lb	2 lb
TS-500-SS	500 lb	2 lb
TS-750-SS	750 lb	2 lb
TS-1K-SS	1,000 lb	2 lb
TS-1.5K-SS	1,500 lb	2 lb
TS-2K-SS	2,000 lb	2 lb
TS-2.5K-SS *	2,500 lb	2 lb
TS-3K-SS	3,000 lb	4 lb
TS-5K-SS	5,000 lb	4 lb
TS-10K-SS	10,000 lb	5 lb
TS-15K-SS *	15,000 lb	8 lb
TS-20K-SS *	20,000 lb	18 lb


* Not NTEP




TS-SS

Dimensions in inches

Capacity	A	B	C	T
25, 200	2.50	2.00	0.75	1/4-28 UNF
250-300	2.50	2.00	0.75	1/4-28 UNF
500-2.5K	2.50	2.00	1.00	1/2-20 UNF
3K	4.00	3.00	1.25	1/2-20 UNF
5K, 10K	4.00	3.00	1.25	3/4-16 UNF
15K	5.50	4.00	1.50	1 1/4-12 UNF
20K	7.00	4.50	2.00	1 1/4-12 UNF

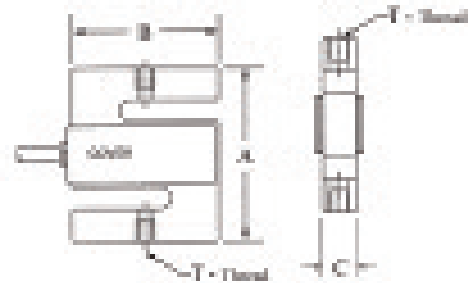

S Type

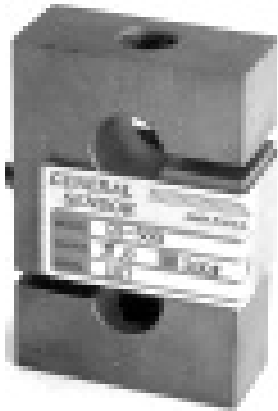

GS




GS Industrial Process Series - General Sensor

These economical tension load cells are intended for commercial use and also industrial process control
 3 mv/v, 0.02% nonlinearity, 380/350 ohm, 20 ft 4 cond cable, nickel plated steel, IP67.
 NTEP 97-022 III, 3,000 div & IIIL, 10,000 div (50 lb to 1,500 lb)


Part Number	Capacity	Weight
GS-50*	50 lb	2 lb
GS-100	100 lb	2 lb
GS-200	200 lb	2 lb
GS-300	300 lb	2 lb
GS-500	500 lb	2 lb
GS-750	750 lb	2 lb
GS-1K	1,000 lb	2 lb
GS-1.5K	1,500 lb	2 lb
GS-2K *	2,000 lb	3 lb
GS-3K *	3,000 lb	4 lb
GS-5K *	5,000 lb	4 lb

* Not NTEP

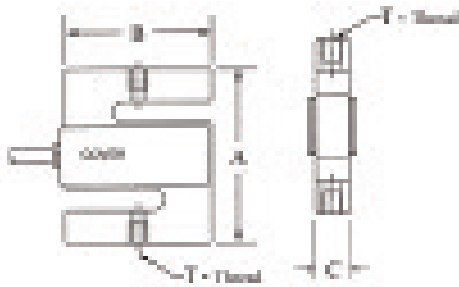

Dimensions in inches

Capacity	A	B	C	T
50-200	2.50	2.00	0.50	1/4-28 UNF
300	3.00	2.00	0.50	3/8-24 UNF
500, 750	3.00	2.00	0.75	1/2-20 UNF
1K-3K	3.00	2.00	1.00	1/2-20 UNF

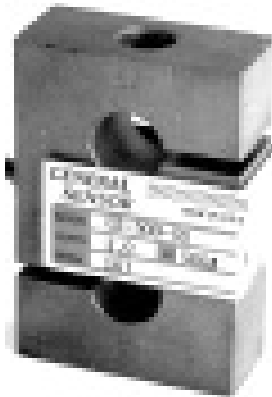

GS-SS




GS-SS Industrial Process Series - General Sensor-

Bi-directional for both tension & compression loads. These economical cells are intended for non commercial use such as industrial process control
 2 mv/v, 0.02% nonlinearity, 400/350 ohm, 20 ft 4 cond cable, **stainless steel**, IP67.

Part Number	Capacity	Weight
GS-1K-SSW	1,000 lb	2 lb
GS-2K-SSW	2,000 lb	2 lb
GS-2K-SS-40 w/40 ft cable	2,000 lb	3 lb
GS-3K-SS-40 w/40 ft cable	3,000 lb	3 lb

Suffix W = welded seal

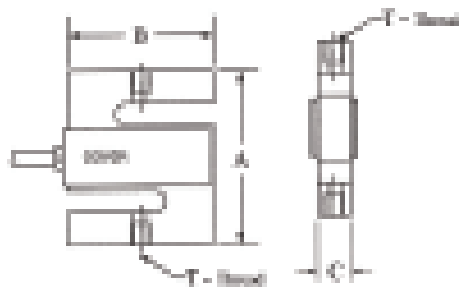

Dimensions in inches

Capacity	A	B	C	T
250	3.00	2.00	0.50	3/8-24 UNF
500, 750	3.00	2.00	0.75	1/2-20 UNF
1K-3K	3.00	2.00	1.00	1/2-20 UNF

S Type

20210 - Artech

3 mv/v, 0.03% nonlinearity, 380/350 ohm, 20 ft 4 cond cable, chrome plated steel.
NTEP 87-057A3 S III 5,000 div & IIIL 10,000 div.


Part Number	Capacity	Weight
20210-25	25 lb	2 lb
20210-50	50 lb	2 lb
20210-75	75 lb	2 lb
20210-100	100 lb	2 lb
20210-150	150 lb	2 lb
20210-200	200 lb	2 lb
20210-250	250 lb	2 lb
20210-300	300 lb	2 lb
20210-500	500 lb	2 lb
20210-750	750 lb	2 lb
20210-1K	1,000 lb	2 lb
20210-1.5K	1,500 lb	2 lb
20210-2K	2,000 lb	2 lb
20210-2.5K	2,500 lb	2 lb
20210-3K	3,000 lb	4 lb
20210-5K	5,000 lb	4 lb
20210-10K	10,000 lb	5 lb
20210-15K	15,000 lb	8 lb
20210-20K	20,000 lb	14 lb



20210

Dimensions in inches

Capacity	A	B	C	T
25-300	2.50	2.00	0.75	1/4-28 UNF
500-2.5K	2.50	2.00	1.00	1/2-20 UNF
3K	4.00	3.00	1.25	1/2-20 UNF
5K, 10K	4.00	3.00	1.25	3/4-16 UNF
15K	5.50	3.50	1.50	1-14 UNF
20K	7.00	4.50	2.00	1 1/4-12 UNF
30K, 40K	10.00	5.75	2.75	1 1/2-12 UNF

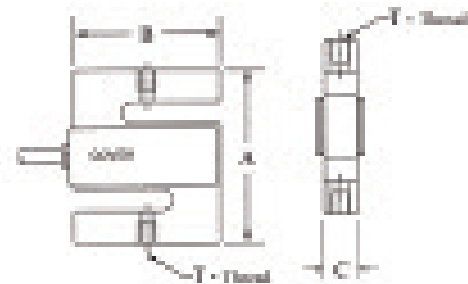

S Type




DS-SS

DS-SS - Diamond Series

Bi-directional for both tension & compression loads.

3 mv/v, 0.03% nonlinearity, 385/350 ohm, 20 ft 4 cond cable, **stainless steel**, IP67.

Part Number	Capacity	Weight
DS-150-SS	150 lb	2 lb
DS-200-SS	200 lb	2 lb
DS-250-SS	250 lb	2 lb
DS-500-SS	500 lb	3 lb
DS-750-SS	750 lb	3 lb
DS-1K-SS	1,000 lb	3 lb
DS-1.5K-SS	1,500 lb	3 lb
DS-2K-SS	2,000 lb	3 lb
DS-2.5K-SS	2,500 lb	3 lb
DS-3K-SS	3,000 lb	6 lb
DS-5K-SS	5,000 lb	6 lb
DS-10K-SS	10,000 lb	6 lb
DS-15K-SS	15,000 lb	8 lb
DS-20K-SS	20,000 lb	8 lb

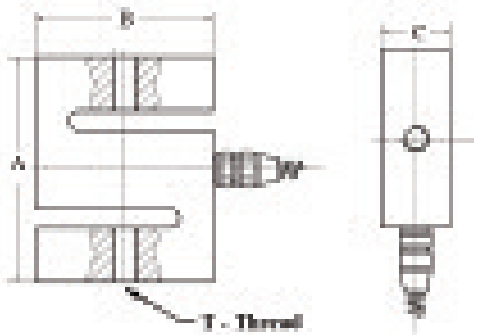

Dimensions in inches

Capacity	A	B	C	T
150, 200	3.00	2.00	0.50	1/4-28 UNF
250	3.00	2.00	0.75	1/4-28 UNF
500-1.5K	3.00	2.00	0.75	1/2-20 UNF
2-3K	3.00	2.00	1.00	1/2-20 UNF
5-10K	4.25	3.00	1.00	3/4-16 UNF
15K	5.50	4.00	1.25	1-14 UNF
20K	7.00	5.00	2.00	1 1/4-12 UNF

S Type

DS - Diamond Series

Bi-directional for both tension & compression loads.

3 mv/v, 0.03% nonlinearity, 385/350 ohm, 20 ft 4 cond cable, alloy steel, IP67.


Part Number	Capacity	Weight
DS-50	50 lb	2 lb
DS-100	100 lb	2 lb
DS-150	150 lb	2 lb
DS-200	200 lb	2 lb
DS-250	250 lb	2 lb
DS-500	500 lb	2 lb
DS-750	750 lb	2 lb
DS-1K	1,000 lb	3 lb
DS-1.5K	1,500 lb	3 lb
DS-2K	2,000 lb	3 lb
DS-2.5K	2,500 lb	3 lb
DS-3K	3,000 lb	3 lb
DS-5K	5,000 lb	4 lb
DS-10K	10,000 lb	5 lb
DS-15K	15,000 lb	8 lb
DS-20K	20,000 lb	16 lb



DS

Dimensions in inches


Capacity	A	B	C	T
50	2.50	2.00	0.50	1/4-28 UNF
100, 200	3.00	2.00	0.50	1/4-28 UNF
250	3.00	2.00	0.75	1/4-28 UNF
500-1.5K	3.00	2.00	0.75	1/2-20 UNF
2-3K	3.00	2.00	1.00	1/2-20 UNF
5-10K	4.25	3.00	1.00	3/4-16 UNF
15K	5.50	4.00	1.25	1-14 UNF
20K	7.00	5.00	2.00	1 1/4-12 UNF

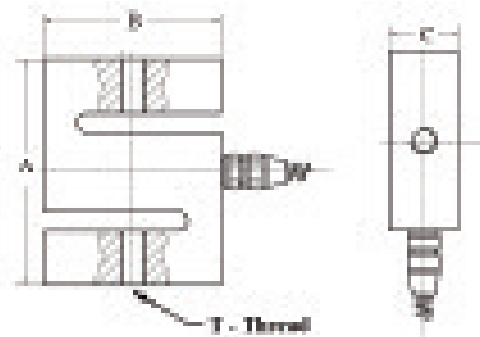

S Type



NS-SS



NS-SS - Nikkei

Bi-directional for both tension & compression loads.

3 mv/v, 0.03% nonlinearity, 380/350 ohm, 20 ft 4 cond cable, **stainless steel**, IP67.

Part Number	Capacity	Weight	Stock
NS-250-SS	25 lb	2 lb	1454
NS-50-SS	50 lb	2 lb	1916
NS-100-SS	100 lb	2 lb	1917
NS-200-SS	200 lb	2 lb	2157
NS-250-SS	250 lb	2 lb	1918
NS-300-SS	300 lb	3 lb	2158
NS-500-SS	500 lb	3 lb	1919
NS-750-SS	750 lb	3 lb	1456
NS-1K-SS	1,000 lb	3 lb	1920
NS-1.5K-SS	1,500 lb	3 lb	1921
NS-2K-SS	2,000 lb	3 lb	1477
NS-2.5K-SS	2,500 lb	3 lb	1922
NS-3K-SS	3,000 lb	6 lb	1923
NS-5K-SS	5,000 lb	6 lb	1924
NS-10K-SS	10,000 lb	6 lb	1925

Dimensions in inches

Capacity	A	B	C	T
250, 300	2.50	2.00	0.5	1/4-28 UNF
500-2.5K	2.50	2.00	0.7	1/2-20 UNF
3K	4.00	3.00	1.0	1/2-20 UNF
5K, 10K	4.00	3.00	1.0	3/4-16 UNF
15K	5.50	3.50	1.5	1-14 UNF
20K	7.00	4.50	1.7	1-14 UNF

S Type

NS - Nikkei

Bi-directional for both tension & compression loads.

3 mv/v, 0.03% nonlinearity, 380/350 ohm, 20 ft 4 cond cable, nickel plated steel, IP67.

NTEP 99-126 S/M III 5,000 div & IIIIL 10,000 div.


Part Number	Capacity	Weight
NS-25	25 lb	2 lb
NS-50	50 lb	2 lb
NS-75	75 lb	2 lb
NS-100	100 lb	2 lb
NS-150	150 lb	2 lb
NS-200	200 lb	2 lb
NS-250	250 lb	2 lb
NS-300	300 lb	2 lb
NS-500	500 lb	2 lb
NS-750	750 lb	3 lb
NS-1K	1,000 lb	3 lb
NS-1.5K	1,500 lb	3 lb
NS-2K	2,000 lb	3 lb
NS-2.5K	2,500 lb	3 lb
NS-3K	3,000 lb	4 lb
NS-5K	5,000 lb	4 lb
NS-10K	10,000 lb	5 lb
NS-15K	15,000 lb	8 lb
NS-20K	20,000 lb	16 lb

Dimensions in inches


Capacity	A	B	C	T
25-300	2.5	2.0	0.75	1/4-28 UNF
500-2.5K	2.5	2.0	1.00	1/2-20 UNF
3K	4.0	3.0	1.25	1/2-20 UNF
5K-10K	4.0	3.0	1.25	3/4-16 UNF
15K	5.5	3.5	1.50	1-14 UNF
20K	7.00	4.5	2.00	1 1/4-12 UNF



NS



S Type



9363



9363 - Revere Transducers Inc

3 mv/v, 0.03% nonlinearity, 350/350 ohm, 20 ft 4 cond cable, **stainless steel.**


100 lb thru 10,000 lb are NTEP.

NTEP 87-051 S IIIIL 10,000 div (B10)

Part Number	Capacity	Weight
9363-D3-50-20T1 *	50 lb	2 lb
9363-B10-75-20P1	75 lb	2 lb
9363-B10-100-20P1	100 lb	2 lb
9363-B10-150-20P1	150 lb	2 lb
9363-B10-200-20P1	200 lb	2 lb
9363-B10-250-20P1	250 lb	2 lb
9363-B10-300-20P1	300 lb	2 lb
9363-B10-500-20P1	500 lb	2 lb
9363-B10-750-20P1	750 lb	2 lb
9363-B10-1K-20P1	1,000 lb	2 lb
9363-B10-1.5K-20P1	1,500 lb	2 lb
9363-B10-2K-20P1	2,000 lb	3 lb
9363-B10-2.5K-20P1	2,500 lb	2 lb
9363-B10-3K-20P1	3,000 lb	4 lb
9363-B10-5K-20P1	5,000 lb	4 lb
9363-B10-10K-20P1	10,000 lb	5 lb
9363-D3-15K-20P1 *	15,000 lb	7 lb
9363-D3-20K-20P1 *	20,000 lb	10 lb

* Not NTEP

Dimensions in inches

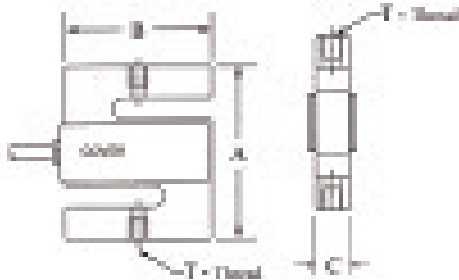


Capacity	A	B	C	T
100-300	2.5	2.0	0.5	1/4-28 UNF
500-1.5K	2.5	2.0	0.7	1/2-20 UNF
2K, 2.5K	2.5	2.0	1.0	1/2-20 UNF
3K	4.0	3.0	1.0	1/2-20 UNF
5K	4.0	3.0	1.0	3/4-16 UNF
10K	4.0	3.0	1.2	3/4-16 UNF
15K	5.5	3.5	1.5	1-14 UNF
20K	7.0	4.5	1.7	1 1/4-12 UNF

S Type

363 - Revere Transducers

3 mv/v, 0.03% nonlinearity, 350/350 ohm, 20 ft 4 cond cable, nickel plated steel.
 100 lb thru 10,000 lb are NTEP.
 NTEP 87-063 S IIL 10,000 div (B10)


Part Number	Capacity	Weight
363-D3-50-20P1	50 lb	2 lb
363-B10-100-20P1	100 lb	2 lb
363-B10-200-20P1	200 lb	2 lb
363-B10-300-20P1	300 lb	2 lb
363-B10-500-20P1	500 lb	2 lb
363-B10-750-20P1	750 lb	2 lb
363-B10-1K-20P1	1,000 lb	2 lb
363-B10-1.5K-20P1	1,500 lb	2 lb
363-B10-2K-20P1	2,000 lb	3 lb
363-B10-3K-20P1	3,000 lb	4 lb
363-B10-5K-20P1	5,000 lb	4 lb
363-B10-10K-20P1	10,000 lb	5 lb
363-D3-15K-20P1	15,000 lb	8 lb
363-D3-20K-20P1	20,000 lb	18 lb



363

Dimensions in inches

Capacity	A	B	C	T
100-300	2.5	2.0	0.5	1/4-28 UNF
500-1.5K	2.5	2.0	0.7	1/2-20 UNF
2K, 2.5K	2.5	2.0	1.0	1/2-20 UNF
3K	4.0	3.0	1.0	1/2-20 UNF
5K	4.0	3.0	1.0	3/4-16 UNF
10K	4.0	3.0	1.2	3/4-16 UNF
15K	5.5	3.5	1.5	1-14 UNF
20K	7.0	4.5	1.7	1 1/4-12 UNF

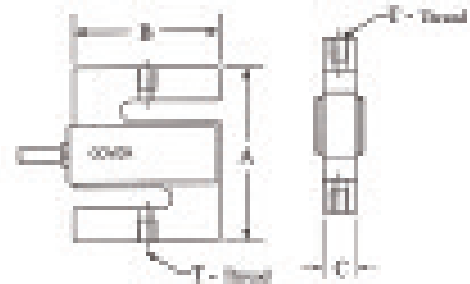

S Type



60001




60001 - Scentroidronics

3 mv/v, 0.03% nonlinearity, 350/350 ohms, 20 ft 4 cond cable, nickel plated steel, IP67.
NTEP 86-043 S/M III 5,000 div & ILL 10,000 div.

Part Number	Capacity	Weight
60001A-25-1177	25 lb	2 lb
60001A-50-1177	50 lb	2 lb
60001A-100-1177	100 lb	2 lb
60001A-200-1177	200 lb	2 lb
60001A-250-1177	250 lb	2 lb
60001A-300-1177	300 lb	2 lb
60001A-500-1177	500 lb	2 lb
60001A-750-1177	750 lb	2 lb
60001A-1K-1177	1,000 lb	2 lb
60001A-1.5K-1177	1,500 lb	2 lb
60001A-2K-1177	2,000 lb	3 lb
60001A-2.5K-1177	2,500 lb	3 lb
60001A-3K-1177	3,000 lb	3 lb
60001A-5K-1177	5,000 lb	4 lb
60001A-10K-1177	10,000 lb	5 lb
60001A-15K-1177	15,000 lb	8 lb
60001A-20K-1177	20,000 lb	18 lb

Dimensions in inches

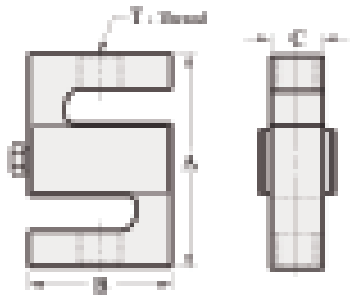

Capacity	A	B	C	T
25-200	2.50	2.00	0.65	1/4-28 UNF
250, 300	3.00	2.00	0.75	3/8-24 UNF
500-2K	3.00	2.00	1.00	1/2-20 UNF
2.5K-4K	3.00	2.00	1.25	1/2-20 UNF
5K	4.25	3.00	1.25	3/4-16 UNF
10K	4.75	3.50	1.25	3/4-16 UNF
15K	5.50	4.00	1.50	1-14-12 UNF
20K	7.00	5.00	2.25	1-1/4-12 UNF

EMPTY PAGE TO BE REMOVED

S Type




60050

60050 - Sensortronics

3 mv/v, 0.03% nonlinearity, 350/350 ohms, 20 ft 4 cond cable, **stainless steel**, IP67.

Part Number	Capacity	Weight	Stock
60050-25	25 lb	2 lb	
60050-50	50 lb	2 lb	
60050-100	100 lb	2 lb	
60050-200	200 lb	2 lb	
60050-250	250 lb	2 lb	1086
60050-500	500 lb	2 lb	1087
60050-750	750 lb	2 lb	1088
60050-1K	1,000 lb	2 lb	1089
60050-1.5K	1,500 lb	2 lb	1090
60050-2K	2,000 lb	2 lb	1091
60050-2.5K	2,500 lb	3 lb	1092
60050-3K	3,000 lb	3 lb	1093
60050-5K	5,000 lb	4 lb	1094
60050-10K	10,000 lb	5 lb	1095
60050-15K	15,000 lb	8 lb	1096

Dimensions in inches



Capacity	A	B	C	T
25-200	2.50	2.00	0.65	1/4-28 UNF
250, 300	3.00	2.00	0.75	3/8-24 UNF
500-2K	3.00	2.00	1.00	1/2-20 UNF
2.5K-4K	3.00	2.00	1.25	1/2-20 UNF
5K	4.25	3.00	1.25	3/4-16 UNF
10K	4.75	3.50	1.25	3/4-16 UNF
15K	5.50	4.00	1.50	1-14 UNF
20K	7.00	5.00	2.25	1 1/4-12 UNF

S Type

60036 - Sentionics

3 mv/v, 0.03% nonlinearity, 350/350 ohms, 20 ft 4 cond cable, nickel plated steel, IP67.


Part Number	Capacity	Weight
60036-25	25 lb	2 lb



60036

Dimensions in inches


Capacity	A	B	C	T
25-250	2.50	2.12	0.50	1/4-28 UNF

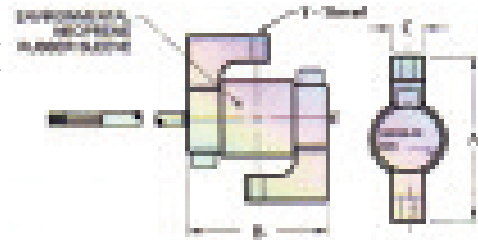

S Type


UB6 - Flintec

Total **stainless steel** construction. Complete welded hermetic sealing.
 2 mv/v, 0.04% combined error, 1106/1000 ohm, 20 ft 4 cond cable, **stainless steel**, IP68.
 OIML R 60

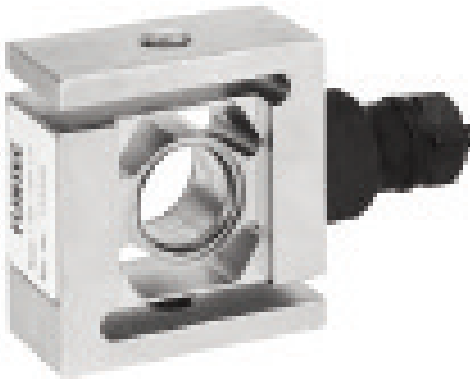

Part Number	Nominal	Capacity	Weight
UB6-1kN-US-GP	225 lb	100 kg	2 lb
UB6-2kN-US-GP	520 lb	200 kg	2 lb
UB6-5kN-US-GP	1,125 lb	500 kg	2 lb

UB6



Dimensions in inches

Capacity	A	B	C	T
100-500kg	2.42	2.42	1.18	1/2-20

S Type

BSP Bidirectional Super Precision - Revere Transducers

Both tension and compression loads, hermetically sealed.
 3 mv/v for 100 lb to 2,500 lb, 2 mv/v for 5K & 10K, 0.03% nonlinearity, 350/350 ohms, 30 ft 4 cond cable, **stainless steel**.
 100 lb thru 5,000 lb are available in NTEP.
 NTEP 88-089 S/M IIIIL 10,000 div (100 lb - 5K)

Part Number	Capacity	mv/v	Weight
BSP-B10-100-30P5	100 lb	3	3 lb
BSP-B10-250-30P5	250 lb	3	3 lb
BSP-B10-500-30P5	500 lb	3	3 lb
BSP-B10-1K-30P5	1,000 lb	3	3 lb
BSP-B10-2.5K-30P5	2,500 lb	3	4 lb
BSP-B10-5K-30P5	5,000 lb	2	5 lb
BSP-D3-10K-30P5	10,000 lb	2	6 lb




BSP




Dimensions in inches


Capacity	A	B	C	T
100-250	3.32	2.48	0.91	3/8-24
500	3.50	2.44	0.71	1/2-20
1K	3.50	2.94	0.71	1/2-20
2.5K	3.75	2.44	0.95	1/2-20
5K, 10K	4.75	2.44	1.44	1-14

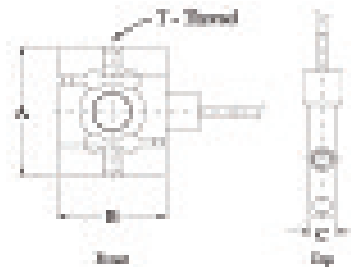

S Type

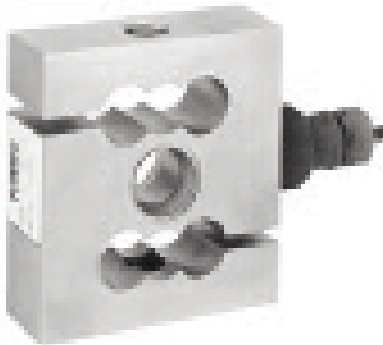

UB1

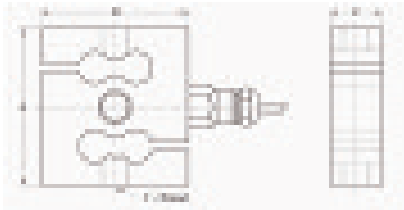

UB1 - Flintec

Total **stainless steel** construction. Complete welded hermetic sealing.
 2 mv/v, 0.04% combined error, 1106/1000 ohm, 20 ft 4 cond cable, **stainless steel**, IP68.
 OIML R 60

Part Number	Nominal	Capacity	Weight
UB1-10kN-US-GP	2,250 lb	1,000 kg	4 lb
UB1-20kN-US-GP	4,500 lb	2,000 kg	4 lb
UB1-50kN-US-GP	11,250 lb	5,000 kg	4 lb

Dimensions in inches


Capacity	A	B	C	T
1t, 2t	3.62	3.38	1.18	5/8-18
50t	5.35	5.63	1.69	1-12

S Type

RSCB - HBM Inc

Hermetically sealed and stainless steel construction. Metric threads only. 1,000 kg is M12 and 2,000 kg and 5,000 kg is M24 x 2.
2 mv/v, 0.03% combined error, 350/350 ohms, 20 ft 6 cond cable, **stainless steel**, IP67.


Part Number	Capacity	Nominal	Weight
RSCB-2t-20100	2,000 kg	5,000 lb	5 lb

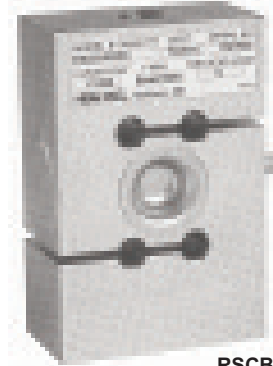

RSCB

Dimensions in inches

Capacity	A	B	C	T
1t	3.44	2.25	1.22	M12 x 1.75
2t	3.94	2.75	1.22	M24 x 2
5t	3.94	3.00	1.44	M24 x 2




60063 - Sentionics

Welded hermetic seal. Physically interchangeable with Sentionics Model 60001/60050.
2 mv/v, 0.03% nonlinearity, 349-450/349-355 ohms, 20 ft 4 cond cable, **stainless steel**, IP68.

NTEP 98-019 III S+M 5,000 div, III S+M 10,000 div 500 to 5,000 lb

Part Number	Capacity	Weight
60063S-500	500 lb	3 lb
60063S-750	750 lb	3 lb
60063S-1K	1,000 lb	3 lb
60063S-1.5K	1,500 lb	3 lb
60063S-2K	2,000 lb	3 lb
60063S-2.5K	2,500 lb	3 lb
60063S-3K	3,000 lb	3 lb
60063S-5K	5,000 lb	4 lb
60063S-10K*	10,000 lb	5 lb

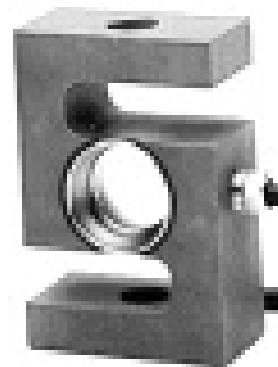


60063




Dimensions in inches

Capacity	A	B	C	T
500-3K	3.00	2.00	1.00	1/2-20 UNF
5K, 10K	4.75	3.50	1.00	3/4-16 UNF
15K	5.50	4.00	1.25	1-14 UNF
20K	7.00	5.00	2.00	1 1/4-12 UNF

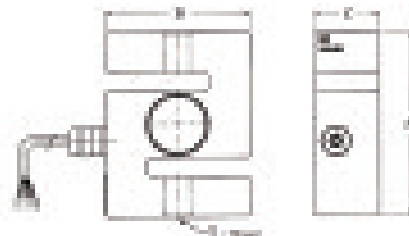


S Type

Aug



620

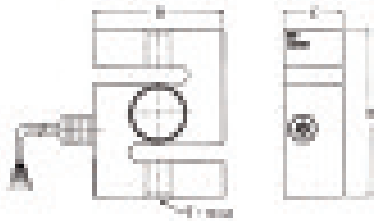

620 - Tedea-Huntleigh

Ultimate protection for hostile weighing environment. All welded hermetic sealing and stainless steel construction while maintaining high accuracy. Polyurethane dual shielded cable.

2 mv/v, 0.03% total error, 400/350 ohm, 5m 6 cond cable, **stainless steel**, IP68.

NTEP 95-130A1 III S 3,000 div & M 5,000 div

Part Number	Nominal	Capacity	Weight
620-F-500kg	1,000 lb	500 kg	3 lb
620-F-1000kg	2,000 lb	1,000 kg	3 lb
620-F-2000kg	4,000 lb	2,000 kg	4 lb
620-F-5000kg	10,000 lb	5,000 kg	5 lb

Dimensions in inches

Capacity	A	B	C	T
0.5-1t	3.54	2.75	1.25	1/2-20
2t	3.54	2.75	1.25	3/4-16
5t	4.72	3.94	1.77	1-12

S Type

SBA - Cas

3 mv/v, 0.03% combined error, 400/350 ohm, 20 ft 4 cond cable, nickel plated steel, IP65
NTEP 96-073, III, 5,000 div, 25 lb - 20,000 lb


Part Number	Capacity	Weight
SBA-50L	50 lb	3 lb
SBA-75L	75 lb	3 lb
SBA-100L	100 lb	3 lb
SBA-150L	150 lb	3 lb
SBA-200L	200 lb	3 lb
SBA-250L	250 lb	3 lb
SBA-300L	300 lb	3 lb
SBA-500L	500 lb	3 lb
SBA-750L	750 lb	3 lb
SBA-1K	1,000 lb	3 lb
SBA-1.5K	1,500 lb	3 lb
SBA-2K	2,000 lb	3 lb
SBA-2.5K	2,500 lb	3 lb
SBA-3K	3,000 lb	3 lb
SBA-5K	5,000 lb	4 lb
SBA-7.5K	7,500 lb	5 lb
SBA-10K	10,000 lb	5 lb
SBA-15K	15,000 lb	8 lb
SBA-20K	20,000 lb	18 lb



SBA

Dimensions in inches


Capacity	A	B	C	T
50-200	2.50	2.00	0.50	1/4-28 UNF
250, 300	3.00	2.00	0.50	3/8-24 UNF
500-2K	3.00	2.00	0.75	1/2-20 UNF
2.5K, 3K	3.00	2.00	1.00	1/2-20 UNF
5K	4.25	3.03	1.00	3/4-16 UNF
7.5K, 10K	4.75	3.50	1.00	3/4-16 UNF
15K	6.50	4.00	1.25	1-14 UNF
20K	7.00	5.00	2.00	1 1/4-12 UNF

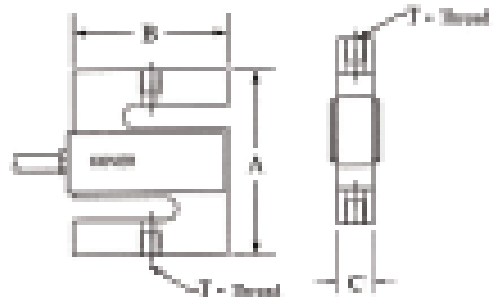

S Type

SB - Group Four


3 mv/v, 0.05% combined error, 350/350 ohm, 20 ft 4 cond cable, aluminum, IP67.



SB-10A

Part Number	Capacity	Weight
SB-10A	10 lb	2 lb
SB-25A	25 lb	2 lb
SB-50A	50 lb	2 lb
SB-100A	100 lb	2 lb
SB-200A	200 lb	2 lb

May
↓

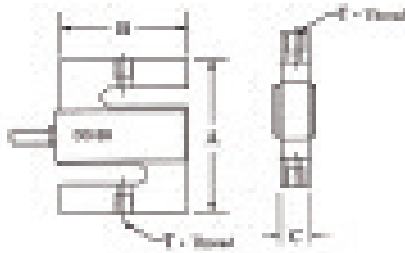

Dimensions in inches

Capacity	A	B	C	T
10-200	2.50	2.00	0.46	1/4-28 UNF