

9123 / 5123 SINGLE ENDED BEAM LOAD CELL



DESCRIPTION:

The 9123/5123 are low profile single ended shear beam type load cells. The 9123 is stainless steel whilst the 5123 is nickel plated tool steel.

These products are suitable for small and medium platform scales, overhead track scales, hopper scales and process weighing applications.

Reliable sealing is ensured by the proprietary TRANSEAL potting compound and additional mechanical protection of the strain gauge area. Ease of installation is made possible through the use of a partially threaded hole to accept levelling feet, load buttons or loading cables.

FEATURES:

- Low profile construction
- Certified to OIML R60
4000d, Y=20000, Z=8000²
- Sealing: IP67 (DIN 40.050)
- Current calibration output (SC) ensures easy and accurate connection of multiple load cells
- Threaded load hole
- **CAPACITIES: 500 → 5000kg**
(1K → 10Klbs also available)

Revere  Transducers

9123/5123 SPECIFICATIONS:

Standard Capacities (=E _{max})	kg / lbs	500, 1000, 2000, 5000 ² / 1K, 2.5K, 4K, 5K, 10K ²		
Accuracy Class According to OIML R-60			C3	C4
Max. Number of Verification Intervals (n _{ic})			3000	4000
Minimum Verification Interval (v _{min} = E _{max} /Y)			E _{max} /6000	E _{max} /8000
Load cell type				9123 5123
Minimum Verification Interval (v _{min} = E _{max} /Y) MR			E _{max} /10000	E _{max} /18000 E _{max} /20000
Accuracy Class According to Type Designation		CC	C3	C4
Combined Error ¹	%S	≤ ± 0.050	≤ ± 0.023	≤ ± 0.018
Hysteresis ¹	%S	≤ ± 0.050	≤ ± 0.017	≤ ± 0.013
Minimum Dead Load Output Return ¹	%S	≤ ± 0.050	≤ ± 0.017	≤ ± 0.013
Minimum Dead Load Output Return 5123 MI8	%S		≤ ± 0.0063	- ≤ ± 0.0063
Non-Repeatability ¹	%S	≤ ± 0.070	≤ ± 0.035	≤ ± 0.026
Creep Error (30 Minutes) ¹	%S	≤ ± 0.060	≤ ± 0.025	≤ ± 0.018
Creep Error (20-30 Minutes) ¹	%S	≤ ± 0.0200	≤ ± 0.0053	≤ ± 0.0039
Temp. Effect on Min. Dead Load Output ¹	%S _{nom} /5°C	≤ ± 0.0250	≤ ± 0.0120	≤ ± 0.0088
Temp. Effect on Min. Dead Load Output MR ¹	%S _{nom} /5°C		≤ ± 0.0070	≤ ± 0.0039 ≤ ± 0.0035
Temp. Effect on Sensitivity ¹	%S/5°C	≤ ± 0.0250	≤ ± 0.0088	≤ ± 0.0065
Minimum Dead Load	%E _{max}	0		
Safe Load Limit (=E _{lim})	%E _{max}	150		
Ultimate Overload (=E _{ult})	%E _{max}	300		
Maximum Safe Side Load	%E _{max}	100		
Deflection at E _{max}	mm	0.4, 0.8, 1.0, 1.1 / 0.4, 0.8, 1.0, 0.9, 1.1		
Excitation Voltage	V	5...12		
Maximum Excitation Voltage	V	15		
Rated Output (=S _{nom})	mV/V	3 ± 0.008		
Zero Balance	%S	≤ ± 1.0		
Input Resistance	Ω	350 ± 3.5		
Output Resistance	Ω	350 ± 3.5		
Insulation Resistance	MΩ	≥ 5000		
Compensated Temperature Range	°C	-10...+40		
Operating Temperature Range	°C	-40...+80		
Storage Temperature Range	°C	-50...+90		
Element Material		9123: stainless steel, 5123: nickel plated alloy steel		
Sealing (DIN 40.050 / EN 60.529)		IP67		
Recommended Torque on Fixation Bolts	Nm	0,5-2t and 1K-4K: 149 / 5t, 5K and 10K: 271		

¹ Applies for the temperature range -10 to +40 °C
2 5t and 10K approval pending

Attention:


All dimension tolerances according to ISO 2768m, unless otherwise specified

Cable specifications:

Cable length: 6m
Excitation + Red
Excitation - Black
Output + Green
Output - White
Shield Transparent
Cable screen is not connected to load cell body. Performance may be affected if load cell cables are shortened.

Correct mounting of the load cells is essential to ensure optimum performance. Further information is available on request.

SC-version: The rated output and the output resistance are balanced in such a way, that the output current is calibrated to within 0.1% of a reference value. This allows easy parallel connection of the load cells.

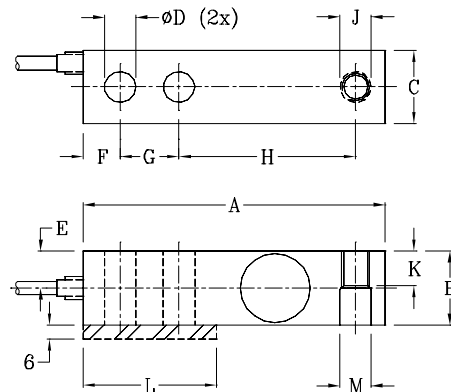

Capacity	Dimensions in mm		Dimensions in inches	
	0.5t - 2t	5t	1K - 4K	5K - 10K
A	130.0	171.5	5.12	6.75
B	31.5	37.8	1.23	1.45
C	31.8	38.1	1.23	1.45
ØD	13.5	20.7	.53	.78
E	15.7	19.1	.62	.72
F	15.7	19.1	.62	.75
G	25.4	38.1	1.00	1.50
H	76.2	95.3	3.00	3.75
J	M12x1.75-6H	M20x2.5-6H	½-20UNF-2B	¾-16UNF-2B
K	15.7	19.1	.62	.75
L	57.2	76.2	2.25	3.00
ØM	13.5	20.7	.53	.78

All specifications subject to change without notice