


ERASER PQ™

PRIMARY CONVEYOR BELT CLEANING SYSTEM

The Eraser PQ (Pit and Quarry) system is an economical cleaner designed for performance and reliability. With a simple and effective spring tensioning unit, it uses our 6" (152 mm) tall polyurethane blade and requires little to no maintenance.

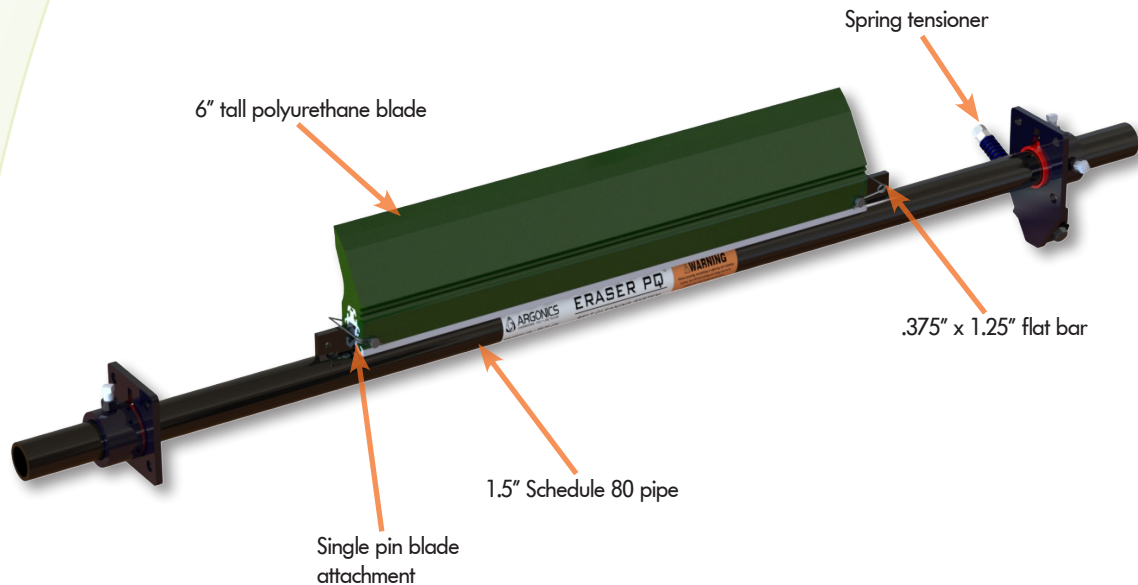

BENEFITS

- Ideally suited for pit and quarry applications
- Economical yet designed for performance and reliability
- Effective cleaning performance with a 6" (152 mm) tall polyurethane blade
- Easy to install and tension and requires little to no maintenance.
- Offers a simple and effective spring tensioning unit - keeping consistent pressure against the conveyor belt
- Single pin blade attachment means quick and simple blade change out with less downtime

BLADES


- | | |
|--|---|
|  N62 Ether
Normally used for extremely wet applications, sands & fines |  B93 Ester
Our high temperature cleaning blade, up to 250°F (121°C) |
|  R80 Ether
Good for wet applications with any pH level |  FO83 Ester
MSHA approved Front Line® flame-retardant cleaning blade |
|  G83 Ester
Our standard, high abrasion-resistant all-purpose cleaning blade |  RU83 Ester
Flame retardant, anti-static cleaning blade |
|  U90
Good for dry applications with any pH level | |



ARGONICS
ENGINEERED POLYURETHANE

SIZING INFORMATION

Dimensions - in. (mm)

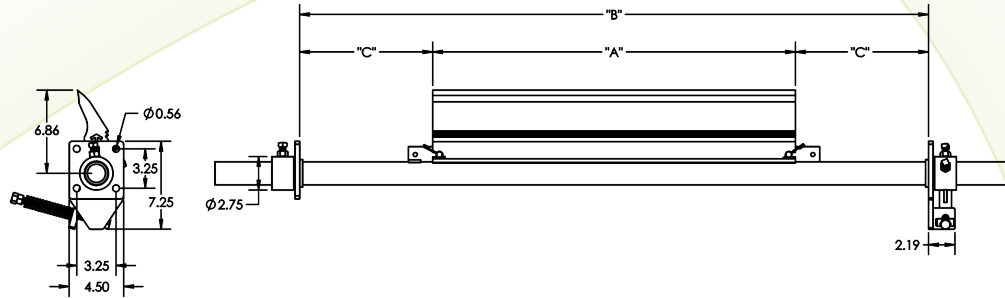


Part Number	A inches (mm)	Min B. inches (mm)	Max B. inches (mm)	Min C. inches (mm)	Max C. inches (mm)	Shipping Weight lbs (kg)
CP-PQ-A1218M-G83	12.00 (305)	18.00 (457)	41.00 (1041)	3.00 (76)	14.50 (368)	31.00 (14)
CP-PQ-A1824M-G83	18.00 (457)	24.00 (610)	47.00 (1194)	3.00 (76)	14.50 (368)	36.00 (16)
CP-PQ-A2430M-G83	24.00 (610)	30.00 (762)	53.00 (1346)	3.00 (76)	14.50 (368)	41.00 (19)
CP-PQ-A3036M-G83	30.00 (762)	36.00 (914)	59.00 (1499)	3.00 (76)	14.50 (368)	46.00 (21)
CP-PQ-A3642D-G83	36.00 (914)	42.00 (1067)	65.00 (1651)	3.00 (76)	14.50 (368)	54.00 (24)
CP-PQ-A4248D-G83	42.00 (1067)	48.00 (1219)	71.00 (1803)	3.00 (76)	14.50 (368)	59.00 (27)
CP-PQ-A4854D-G83	48.00 (1219)	54.00 (1372)	77.00 (1956)	3.00 (76)	14.50 (368)	64.00 (29)
CP-PQ-A5460D-G83	54.00 (1372)	60.00 (1524)	83.00 (2108)	3.00 (76)	14.50 (368)	69.00 (31)

SPECIFICATIONS


Recommended Belt Speeds
0 - 450 fpm (2.29 m/s)

Pulley Diameter (PD)
Minimum: 8" (203 mm)
Maximum: 20" (508 mm)

MOUNTING INFORMATION

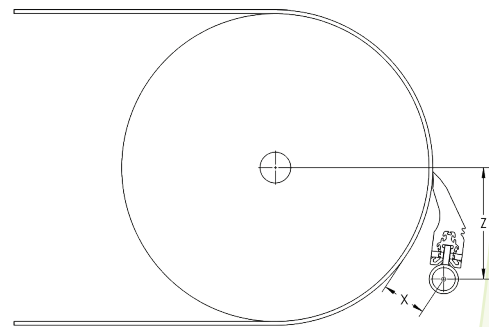

NOMENCLATURE

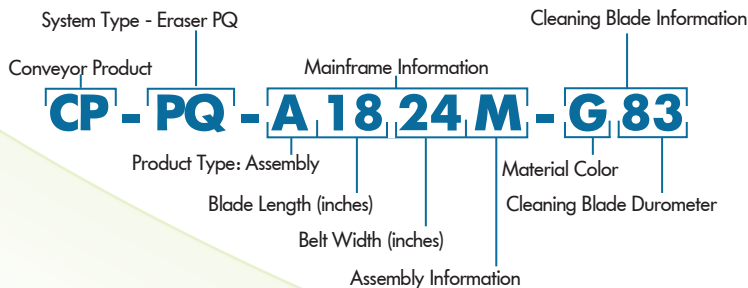

Pulley Diameter	X	Z
8" - 9" (203 mm - 229 mm)	4" (102 mm)	7.25" (184 mm)
10" - 11" (254 mm - 280 mm)	3.75" (96 mm)	7.25" (184 mm)
12" - 13" (305 mm - 331 mm)	3.5" (89 mm)	7.25" (184 mm)
14" - 20" (356 mm - 508 mm)	3.25" (82.5 mm)	7.25" (184 mm)



ARGONICS
ENGINEERED POLYURETHANE



Jamieson Equipment Company
www.jamiesonequipment.com
toll free 800.875.0280