

MEASURE RITE® Mixer & Slump Rack Meter

3/4" to 2" MR-1b

DESCRIPTION

The MEASURE RITE® battery operated Truck and Slump Rack Meter is used for accurately measuring and dispensing water for premixed batches at the job site. The truck meter helps minimize mix errors and batch waste.

OPERATION

The ladder platform area is the ideal mounting location for reardischarge truck meter applications, just upstream (and in line with) the water manifold. The meter may also be mounted securely at the slump and washout racks. Verify that any movement of the platform will not cause the meter to contact the barrel or other components.

APPLICATIONS

The MEASURE RITE meter will allow the user to accurately measure the amount of add water on the truck or at the slump rack.

FEATURES

- · Air slug tolerant
- Highly rugged and durable
- · Compact and user friendly
- · Easy to install
- Easy to calibrate
- · Single button operation
- Powered by two internal lithium batteries (handle according to state/federal guidelines)
- · On-Off switch to conserve power and extend battery life

Options

- · Mounting bracket 3/4" and 1" units
- Ball valve (mount 5 pipe diameters downstream of meter)
- Upstream strainer (60 mesh recommended at least 10 pipe diameters upstream of valve)
- 90° front panel orientation (optional factory ordered)

Power

- Internal batteries, no external wires.
- The unit contains two (2) C-size lithium batteries.
- The batteries are potted into the housing, which is replaceable only by the factory.
- If used (switch-on) for approximately 8-10 hours/day, battery life expectancy is at least 5 years.
- Units containing lithium batteries should be handled according to state, federal and local regulations. Special shipping regulations apply.



MATERIALS

Meter Body	Bronze			
Impeller	316SST			
Shaft	Tungsten carbide			
Bearings	Torlon (high performance polymer)			
Electronics Housing	Coated aluminum			
Window	Tempered glass			
Seals	EPDM			
Sensor Tip	PPS			

SPECIFICATIONS


Meter Size	3/4" NPT	1" NPT	1-1/4" NPT	1-1/2" NPT	2" NPT		
Flow Range	530 gpm (19113	850 gpm (30189	1590 gpm (57340	21125 gpm (79473	35200 gpm 132757		
	lpm)	lpm)	lpm)	lpm)	lpm)		
Pressure Rating	400 psig @ 33140° F (28 bar @ 0.560° C) 225 psig @ 180° F (16 bar @ 82° C)						
Max. Ambient Temp.	140° F (60° C)						
Accuracy	± 1% or better (within flow range)						
Standards	Truck meter meets Alabama DOT specifications ALDOT-407-01 and New York Spec Truck Mixer 501-3.04 requirements						

CON-DS-01154-EN-02 (September 2014)

Product Data Sheet



DIMENSIONS

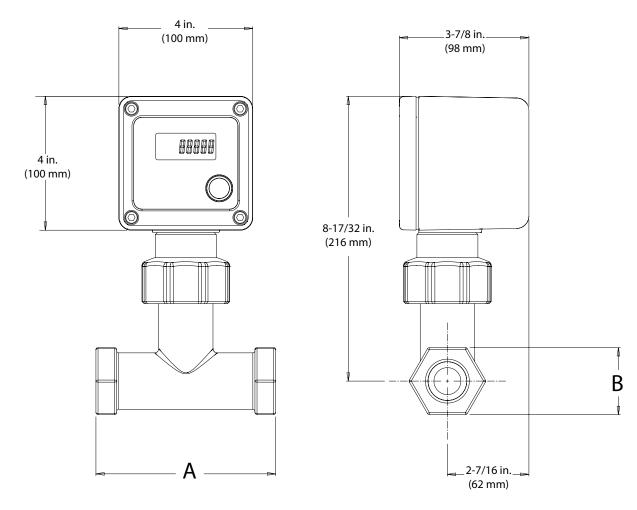

Meter Size	3/4" NPT	1" NPT	1-1/4" NPT	1-1/2" NPT	2" NPT
Α	5.375 in. (136 mm)	5.375 in. (136 mm)	6.234 in. (158 mm)	6.703 in. (170 mm)	7.766 in. (197 mm)
В	2 in. (50 mm) hex	2 in. (50 mm) hex	2.375 in. (60 mm) hex	2.75 in. (70 mm) hex	3.3125 in. (84 mm) hex
Part Number	255317-0001	255318-0001	255319-0001	255320-0001	255321-0001

Control. Manage. Optimize.

MEASURE RITE is a registered trademark of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2014 Badger Meter, Inc. All rights reserved.

Legacy Document Number: CTB-058-01

