






DIMENSIONS



FEATURES

- IP66 / 67
- NEMA 4, 4x
- High Visibility Indicator Dome
- Compact Design

TECHNICAL DATA

General Specifications

Body Material	Die cast aluminum
Indicator Dome	Polycarbonate
Coating	Grey polyester
Conduit Thread	1/2" NPT or M20
Conduit Quantity	2
Temperature Range	-13°F to 149°F (-25°C to 65°C)
Mounting Pattern	VDI/VDE 3845
Terminal	8 Pole configuration
O-Rings	EPDM
Indicator	Open (yellow) Close (red) Open (green) Close (red) Open (black) Close (yellow)
Ratings	IP66/67 & NEMA 4, 4x
Certification	cULus on most models CE Declaration


Mechanical Switches

Switch Type	SPDT	SPDT Low Power		
Switch Ratings	10A, 250V AC 1/2 HP, 250V AC 0.25A, 250V DC 0.5A, 125V DC	0.1A, 125V ACc 0.1A, 30V DC 1mA, 4V AC/DC min		
Max Number of Switches – 5A	2	2		
Approvals	cULus	cULus		
3-Wire DC Proximity Switches	PNP N.O.	PNP N.C.	NPN N.O.	NPN N.C.
Power Supply	Class 2	Class 2	Class 2	Class 2
Operating Voltage	10-30V DC	10-30V DC	10-30V DC	10-30V DC
Load Current	≤ 100 mA	≤ 100 mA	≤ 100 mA	≤ 100 mA
Current Consumption	≤ 15 mA	≤ 15 mA	≤ 15 mA	≤ 15 mA
Leakage Current	≤ 0.5 mA	≤ 0.5 mA	≤ 0.5 mA	≤ 0.5 mA
Voltage Drop	≤ 3V	≤ 3V	≤ 3V	≤ 3V
Max Number of Switches	2	2	2	2
Approvals	cULus	cULus	cULus	N/A
2-Wire Proximity Switches	140V N.O.	250V N.O.		
Operating Voltage	20-140V AC 10-140V DC	20-250V AC 10-300V DC		
Load Current	5-200 mA	≤ 100 mA		
Leakage Current	≤ 0.8 mA	≤ 1.7 mA		
Voltage Drop	≤ 7V	≤ 6V		
Max Number of Switches	2	2		
Approvals	cULus	N/A		

BRACKET


Bracket Type	NAMUR Pattern	Actuator Series	Actuator Size	VSM / Actuator	Std. Part No.
Single Piece	30 x 80	92 / 93	063 - 128	Imperial / Imperial	5B0000-22600534
				Metric / Metric	5B0000-22650534
		98	All	Imperial / Metric	5B0000-22630534
				Metric / Metric	5B0000-22650534
Adjustable	30 x 80 or 30 x 130	92 / 93	063 - 210	Imperial / Imperial	5B0000-22601534
			063 - 255	Metric / Metric	5B0000-22651534
			255	Imperial / Metric	5B0000-22631534
		98	All	Imperial / Metric	5B0000-22631534
				Metric / Metric	5B0000-22651534

Single Piece Bracket

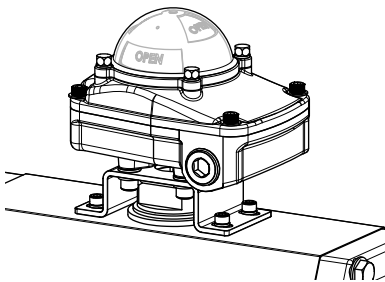


30mm x 80mm

Adjustable Bracket for both 30x80 and 30x130 NAMUR mounting pads (fits all S92/93/98 actuators)

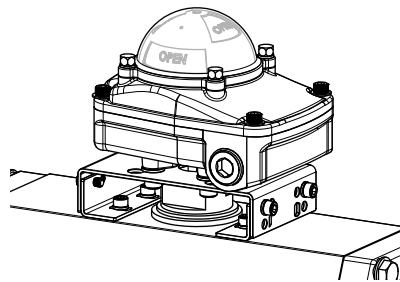


30mm x 80mm

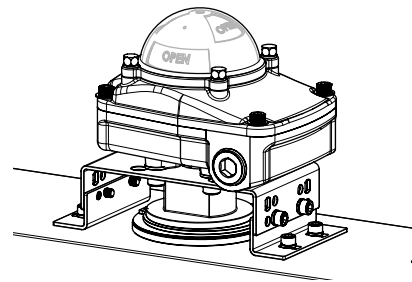

30mm x 130mm

PART NUMBERING SYSTEM

5A000X-126X XXX

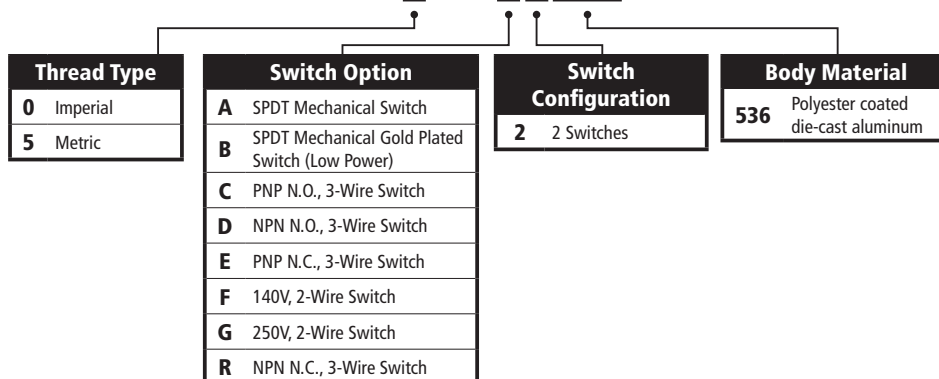

All statements, technical information, and recommendations in this bulletin are for general use only. Consult Bray representatives or factory for the specific requirements and material selection for your intended application. The right to change or modify product design or product without prior notice is reserved. Patents issued and applied for worldwide.

Bray® is a registered trademark of Bray International, Inc.

© 2018 Bray International. All rights reserved.

TM-1090_EL_Series 5A_10_2018