

Deck Mounted Double Sheave Fairleads

Description:


Wintech's double sheave fairleads are designed for mooring or load moving applications where the cable exit angle changes with varied conditions.

Standard Features:

- Self-aligning design for cable exit at a wide range of angles
- 360° head rotation
- Sealed tapered roller bearings in housing and sheaves
- Heavy duty fabricated steel construction
- Weld down or bolt down base

Options Available:

- Rear entry sheave for alignment of cable to winch
- Nylatron synthetic cable sheaves
- Maximum angle STDP's
- Customized sheave configurations

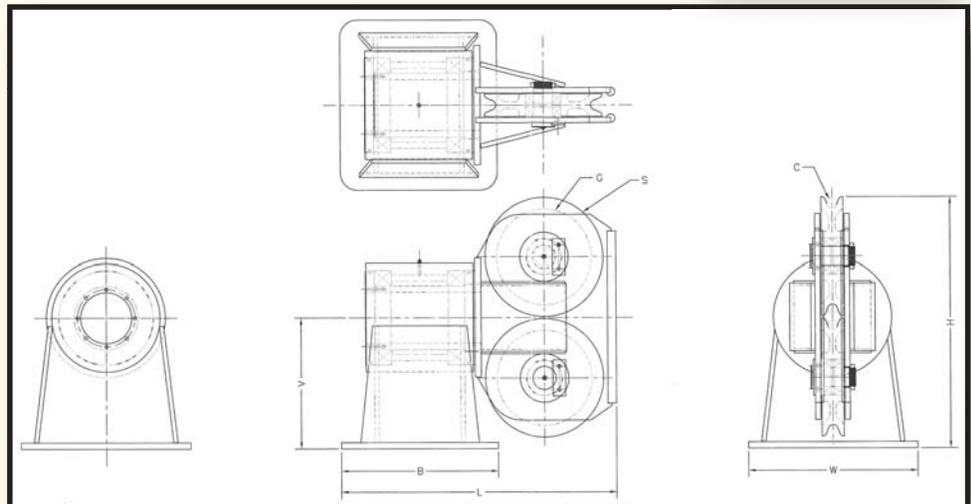

Model Number	Wire Rope Size	Wire Breaking Strength	Dimensions (inches)							Approximate Weight (lbs)
			Sheave Diameter 'S'	Groove Diameter 'G'	Overall Height 'H'	Overall Length 'L'	Overall Width 'W'	Base Length 'B'	Cable Height 'V'	
BSF2-2	5/8"	35,800 lbs	8	6.5	16.88	18.75	9.75	9	8.75	165
BSF2-3	3/4"	58,800 lbs	10	8.25	21.5	23.5	15.00	13.5	11	300
BSF2-4	1"	103,400 lbs	12	9.75	25.5	28	17.50	16	13.5	600
BSF2-5	1-1/4"	159,800 lbs	14	11.25	29.63	32.44	20.00	18.5	15.5	800
BSF2-6	1-1/2"	228,000 lbs	18	14.25	38.5	42	26	24	19.5	1500
BSF2-7	1-3/4"	266,000 lbs	22	18.5	47	51.5	32	29.5	23.5	2200

Due to our policy of continuing development, all specifications are subject to change without notice. Users of these products are responsible for ensuring their suitability for the application in which they are being used.

Made in the USA

