



RL1380 Single Point, Stainless Steel NTEP 1:3000 Class III Single Cell, IP67

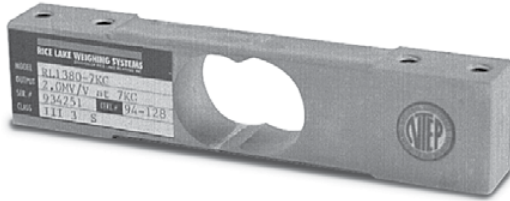

Picture is a representation of actual product

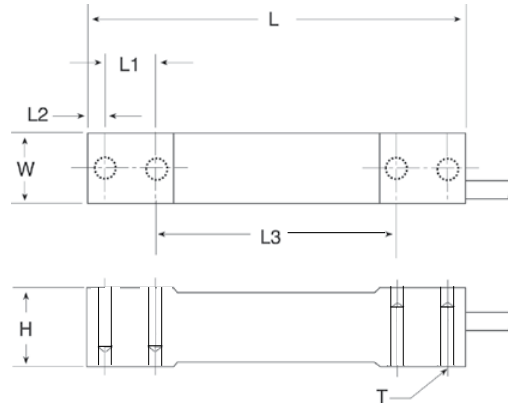

SPECIFICATIONS

Full Scale Output:
2.0 mV/V

Output Resistance:
350 ohms +/- 3

Input Resistance:
350 ohms

Material/Finish:
Stainless steel

Temperature:
Compensated range
14°F to 104°F/-10°C to 40°C

Safe Overload:
150% Full scale

Rated Excitation:
10V DC (15V maximum)

Combined Error:
0.03% Full scale

Insulation Resistance:
1000 megohms

Seal Type:
Environmentally sealed, IP67

Cable Length:
3.1 m/10 ft

Cable Diameter:
.190 polyurethane jacket

Cable Color Code:
Green..... + Excitation
Black..... - Excitation
White..... + Signal
Red..... - Signal
Yellow..... Shield

Deflection:
<.4 mm FS

Max Platform Size:
15.75 in x 15.75 in

Warranty:
Two-year limited warranty



DIMENSIONS

RATED CAPACITY	W	L	L1	L2	L3	T	H
kg/mm							
7-15	19.1	139.7	19.1	6.4	88.9	1/4-20UNC	30.2
30-60	23.9	139.7	19.1	6.4	88.9	1/4-20UNC	30.2
lb/inches							
15.4-33.1	.75	5.50	.75	.25	3.50	1/4-20UNC	1.19
66.1-132.3	.94	5.50	.75	.25	3.50	1/4-20UNC	1.19

ORDER INFORMATION

LOAD RATING	PART #	PRICE
7 kg (15.4 lb)	30783	Consult
10 kg (22.0 lb)	30782	Consult
15 kg (33.1 lb)	30781	Consult
30 kg (66.1 lb)	30780	Consult
60 kg (132.3 lb)	30779	Consult

INTERCHANGEABLE PRODUCTS

MANUFACTURER	MODEL	PAGE#
HBM®	PWS	253

RICE LAKE WEIGHING SYSTEMS

