


**RLETB** Single-Ended Beam, Alloy Steel, OIML C3, IP67



Picture is a representation of actual product

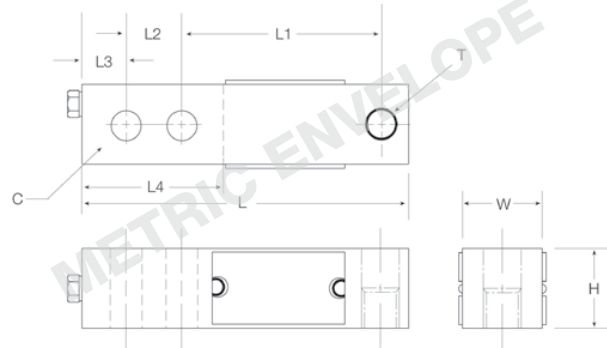

**SPECIFICATIONS**

**Full Scale Output:**  
3.0 mV/V

**Output Resistance:**  
349-355 ohms

**Input Resistance:**  
343-357 ohms

**Material/Finish:**  
Alloy steel

**Temperature:**  
Compensated range  
14°F to 104°F / -10°C to 40°C

**Safe Overload:**  
150% Full scale

**Safe Sideload:**  
100% Full scale

**Rated Excitation:**  
10V DC (15V maximum)

**Combined Error:**  
0.03% Full scale

**Insulation Resistance:**  
5000 megohms

**Seal Type:**  
Environmentally sealed, IP67

**Cable Length:**  
6 m / 19.7 ft

**Cable Diameter:**  
.200 polyurethane jacket

**Cable Color Code:**  
Red ..... + Excitation  
Black ..... - Excitation  
Green ..... + Signal  
White ..... - Signal

**Warranty:**  
Two-year limited warranty

**Approvals:**  




**DIMENSIONS**

RATED CAPACITY C	H	L	L1	L2	L3	L4	W	T
<b>kg/mm</b>								
500-2000	57.0	32.0	130.0	76.0	25.0	16.0	13.0	M12 x 1.75-6H
5000	76.0	38.0	171.0	95.0	38.0	19.0	20.7	M20 x 1.5-6H
<b>lb/inches</b>								
1102.3-4409.2	2.25	1.25	5.12	3.00	.98	.63	.51	M12 x 1.75-6H
11,023.1	3.00	1.50	6.73	3.74	1.50	.75	.81	M20 x 1.5-6H

**ORDER INFORMATION**

LOAD RATING	PART #	PRICE
500 kg (1102.5 lb)	31249	Consult
1000 kg (2205.0 lb)	31248	Consult
2000 kg (4410.0 lb)	31247	Consult
5000 kg (11,025.0 lb)	31246	Consult

RICE LAKE WEIGHING SYSTEMS