



... "A Winch For Every Application"

5319 Shreveport - Blanchard Hwy.  
Shreveport, LA 71107

Phone  
(888) 946-8325

Fax  
(318) 929-1245

## Standard Upright Electric 40 and 65 US Ton Barge Winch



*Taking The Winch Industry By Storm*

### STANDARD FEATURES:

- Fully reversing crane and hoist duty motors that are totally enclosed.
- Control from pilot house or deck.
- Stall pulls to 40,000 lbs.
- Improved brake holding capacity to 70,000 lbs.
- Drum guard prevents slack cable from fouling gears.
- Hand wheel for operation in the event of power loss.

### OPTIONAL FEATURES:

- Flange-mounted ball bearings for power shaft, factory installed.
- Grooved drums
- Drum flange divider
- Remote control packages:
  - NEMA 1; General purpose enclosure
  - NEMA 4; Watertight enclosure
  - NEMA 1 or 4 magnetic reversing starter
  - NEMA 1 or 4 push button station
- **Wintech Winch Cables**

*Wintech electric barge winches are designed to protect operator profits by speeding up tow makeup and breakdown.*

## Low Downtime and Maintenance

Electric barge winch-standard specifications												
Model No.	Dog Holding Capacity (tons)	Capacities (lbs)			Holding (lbs)	Line Speed (fpm)			Volts	Weight		
		Rated Pull	Stall* Pull	Hand Pull		Electric Brake	No Load	Rated Pull		HP	Phase Cycle	Net (lbs)
301L-RC	40	3,200	9,000	20,000	55,000	50	42	5	230/460-3-60	728	785	27.0
311L-RC	40	4,200	11,500	20,000	55,000	35	31	5	230/460-3-60	728	785	27.0
321L-RC	40	4,800	13,000	20,000	55,000	50	42	7.5	230/460-3-60	859	922	27.0
331L-RC	40	6,400	17,500	20,000	55,000	23	21	5	230/460-3-60	728	791	27.0
341L-RC	40	6,400	17,500	20,000	55,000	35	31	7.5	230/460-3-60	859	1038	27.0
351L-RC	40	8,500	23,500	20,000	55,000	17	15	5	230/460-3-60	728	1050	27.0
601L-RC	65	4,500	1,500	40,000	70,000	34	30	5	230/460-3-60	1290	1536	34.0
611L-RC	65	6,500	22,000	40,000	70,000	34	30	7.5	230/460-3-60	1331	1536	34.0
621L-RC	65	8,500	28,000	40,000	70,000	17	15	5	230/460-3-60	1331	1536	34.0
631L-RC	65	12,000	40,000	40,000	70,000	17	15	7.5	230/460-3-60	1361	1536	34.0
641L-RC	65	12,000	40,000	40,000	70,000	23	20	10	230/460-3-60	1361	1536	34.0

Note: All models are shown with "L" designating left hand models; for right hand models, substitute "R" for "L" in model number. Capacities are rated on first layer.

\* Stall pull rate at specified voltage with holding dog engaged.

**Warning:** Before installation see maintenance and operations manual for additional warnings and precautions. This equipment is not to be used for lifting, supporting, or transporting people, or lifting or supporting loads over people.




... "A Winch For Every Application"

5319 Shreveport - Blanchard Hwy.  
Shreveport, LA 71107


Phone  
(888) 946-8325

Fax  
(318) 929-1245


## Standard Upright Electric 40 and 65 US Ton Barge Winch

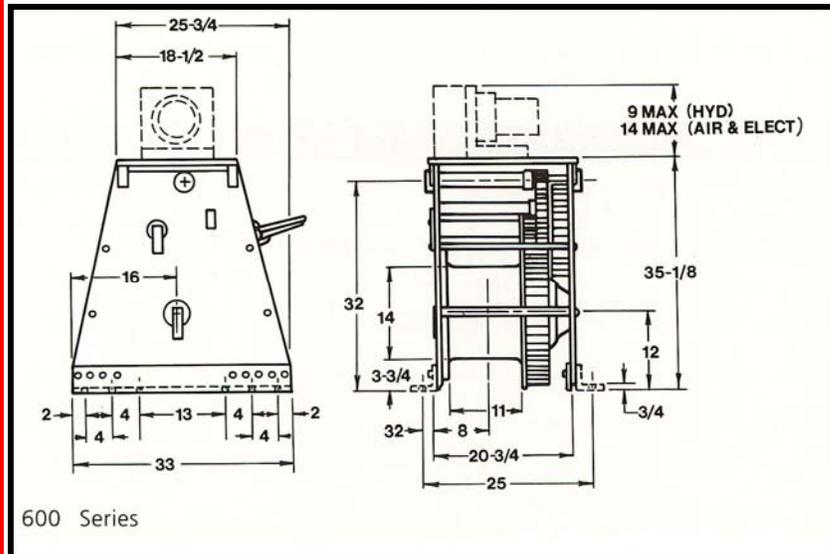

*Taking The Winch Industry By Storm*

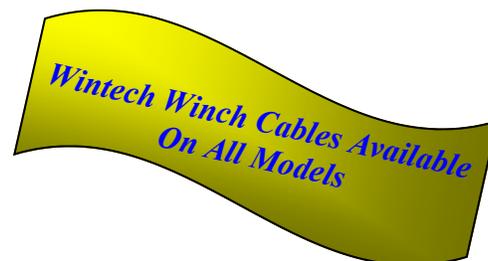

## Superior Value - Wintech Reliability / Quality

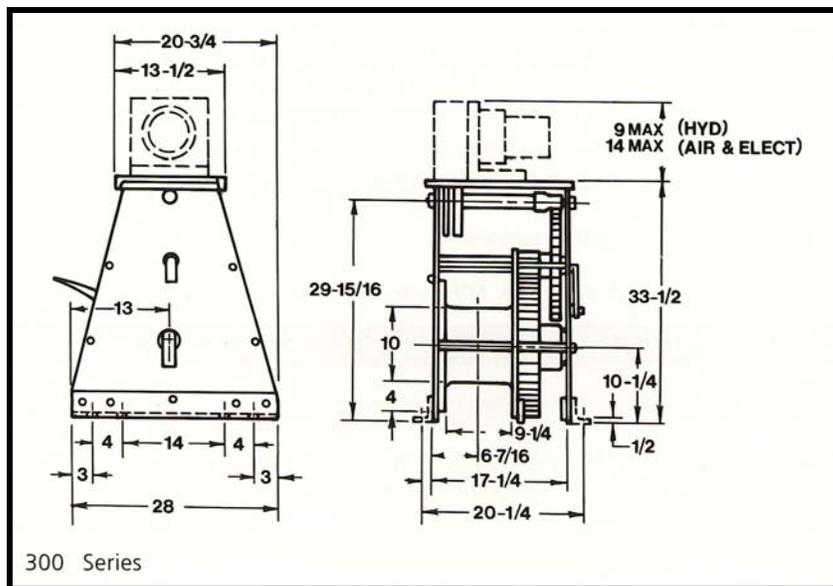

NOTE: Dimensions are subject to change. Please contact factory for certified prints.



Length (in.)	40 to std-10" drum dia.			
	5/8 In.	3/4 In.	7/8 In.	1 In.
9*	286	196	130	116
17	559	386	258	232
35	1174	813	546	493
51	1755	1216	818	740
69	2336	1620	1090	986

Length (in.)	65 to std-14" drum dia.			
	7/8 In.	1 In.	1 1/8 In.	1 1/4 In.
11*	210	133	119	67
20	418	265	240	136
41	834	531	481	274
61	1271	810	734	418
82	1686	1075	975	556

\* Standard length of drum (drum lengths are rounded to the nearest inch)