

New Fully Engineered

DH2 SERIES


VIBRATING SCREENER

Owning a SMICO vibrating screener will provide Low Operating Cost, Excellent Product Classification and High Production with Minimum Maintenance.

- *Rugged – Engineered for a long service life with steel plate construction.*
- *Dependable – Low maintenance grease lubricated two bearing top or centroid mounted drive designed for field service.*
- *Highly Efficient – Conveying motion is parallel to sides for minimum degradation, designed to run at 900 - 1750 RPM, producing up to 5Gs acceleration.*
- *Flexability – Simple adjustments allow you to tune amplitude and frequency to your application.*
- *Smooth – Vibration isolation with coil springs and pivoting motor base.*
- *Versatile – Custom fit to your application with our many special features or stock machines for immediate installation.*

smico

MADE IN USA

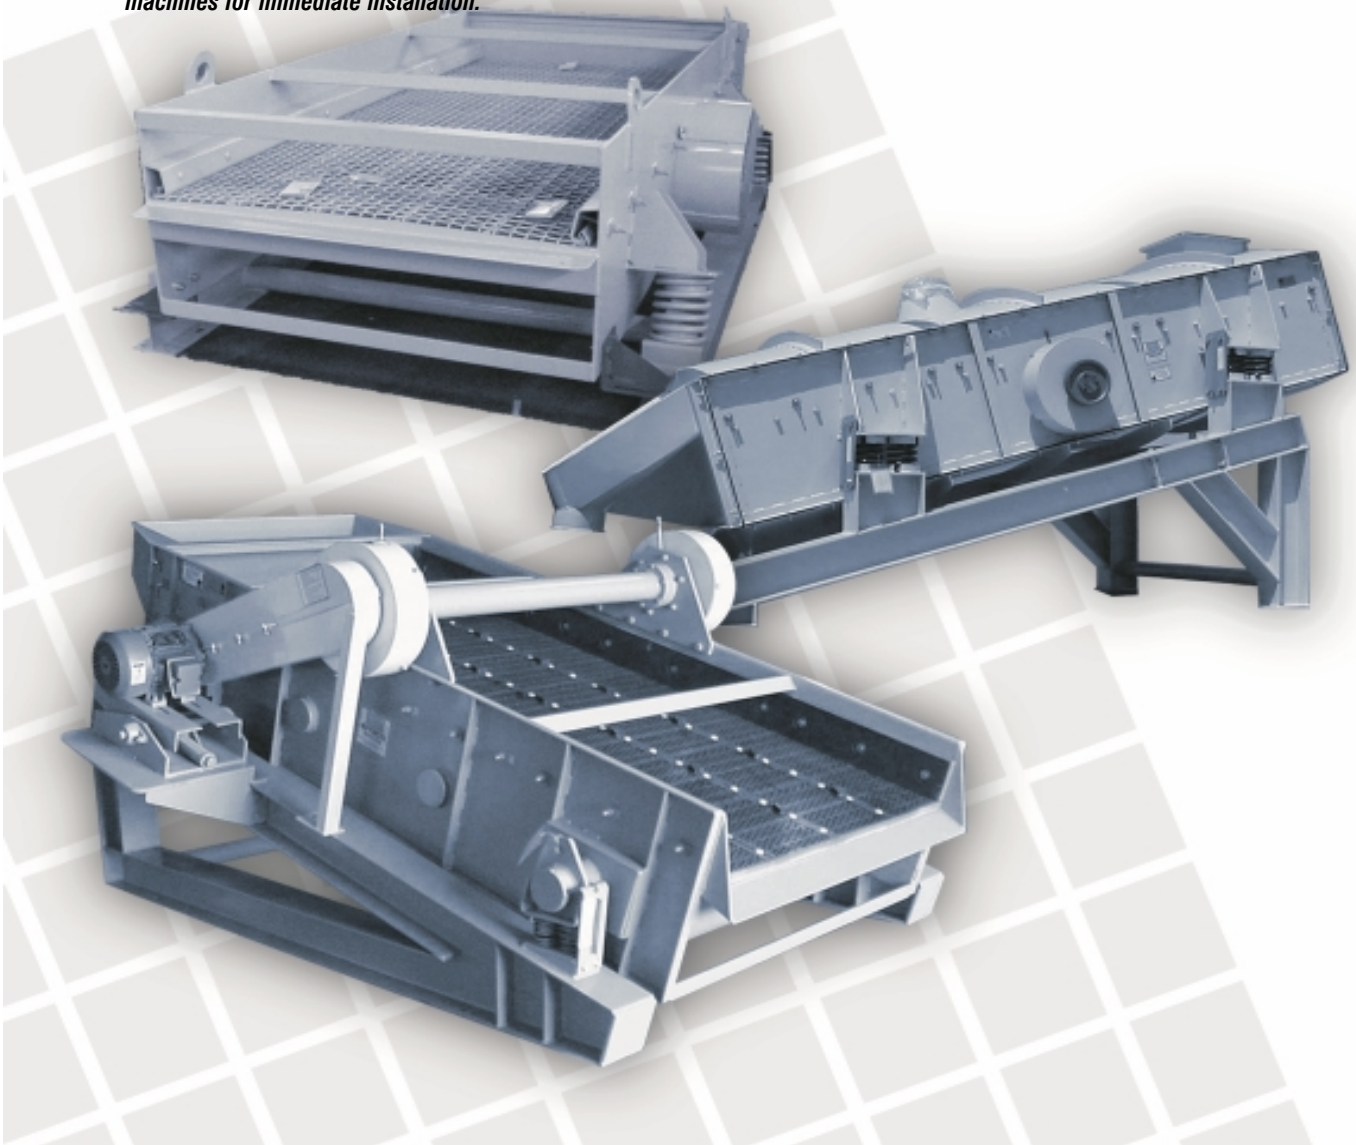

SPECIFICATIONS:

Typical Applications:


- Aggregate
- Feed Pellets
- Plastics – from plastic trash to plastic resin beads
- Chemicals – from acids to pellets
- Recycling
- Sand
- Asphalt Ingredients – scalping to multi-grade sorting
- Glass – crushed to fine size sorting
- Feeders

Options:



- | | | |
|-------------------------|-----------------------------|---------------------|
| ■ Self Cleaning Screens | ■ Screen Washers | ■ Perforated Plates |
| ■ Aspirators | ■ Rubber Isolators | ■ Piano Wire |
| ■ Enclosures | ■ Poly Decks | ■ Woven Wire |
| ■ Legs | ■ Oil Lubrication | ■ Weir Feeders |
| ■ Cable Suspension | ■ Deck Selector / Bypass | ■ Spouts/Chutes |
| ■ Wear Liners | ■ High Temperature Features | ■ Hoppers |

Sizes:

- 24" to 96" wide by 6' to 24' long
- One to four screen decks
- 60 to 150 mm FAG spherical bearings

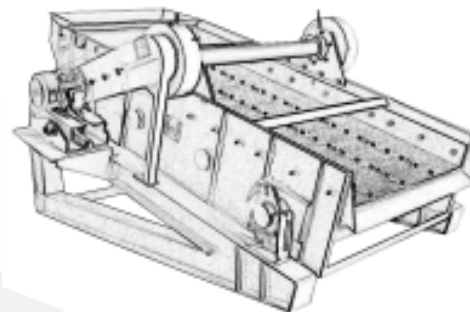

Typical Print
4' x 10' Two Deck - 15 degrees

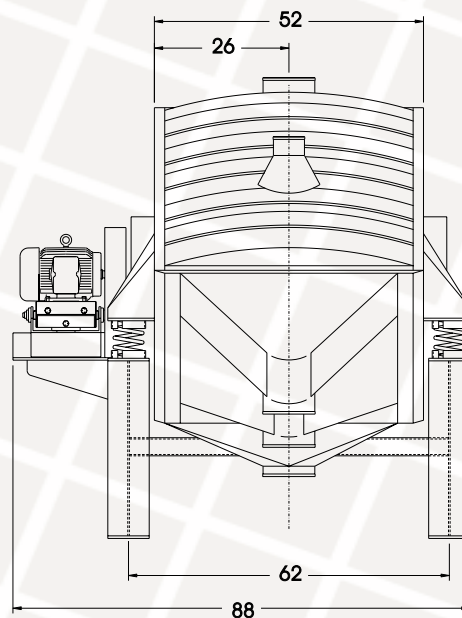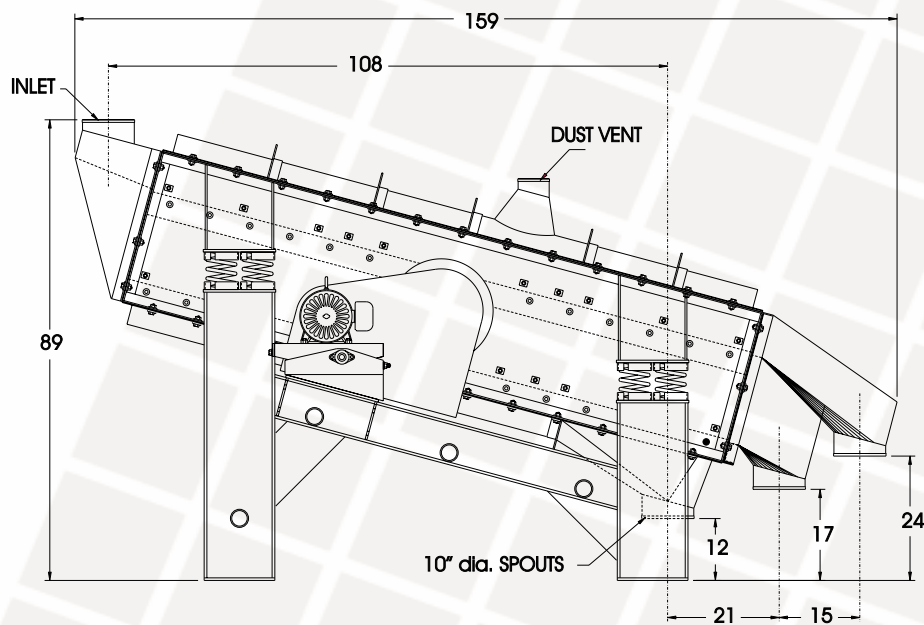

Model 4810-2D-ED2