

GORON

DS100

Weight Indicator



DS100 Features...

- Cost Effective General Purpose Indicator
- NTEP Approved Legal for Trade at 5000d
- Bright and Easy to Read LED Display

Smart Design...

...Better Weighing






Model DS100 General Purpose Indicator

Doran's DS100 Digital Weight Indicator is the smart solution for most general purpose weighing tasks. Adaptable and economically priced, the DS100 includes many features found on much higher priced indicators. For new or retrofit applications, the Doran DS100 is the answer!

DS100 Applications

- Floor Scales
- Bench Scales
- Data Collection
- Inventory Control
- Shipping/Receiving
- Portable Weigh Stations
- Loaner / Rental Unit
- Manual Batching
- Manifest System
- Quality Control

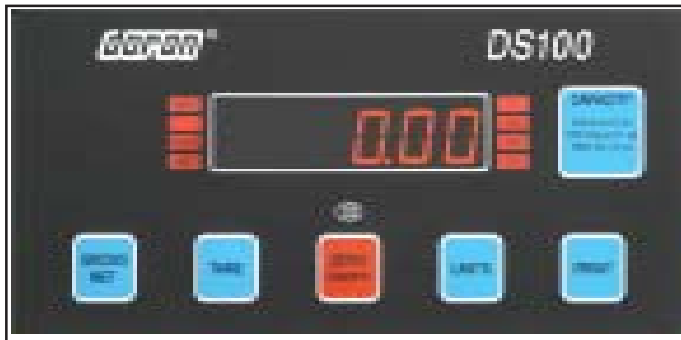

Doran DS100 Front Panel


*Big, bright red LED display: readable to 25 feet.
Five function buttons: ZERO, TARE, GROSS/NET, UNITS, PRINT provide top end versatility priced attractively.*

Features:

- Small Case Size
- Priced Competitively
- lb, kg, g, oz or lb:oz Weight Display
- AC or External DC/Vehicle DC Power
- Drives up to four 350 Ohm Load Cells
- U-Bracket Mount - Table, Wall, or Shelf

Connect to any Doran Base for a complete weighing system.

Model No.	Base Size	Capacity (lb)
DXL7000	10" x 10" x 2"	2, 5, 10, 25, 50
DXL8000	12" x 12" x 3"	25, 50, 100
DXL9000	15" x 15" x 3"	50, 100, 200
DXL3000	18" x 18" x 4"	50, 100, 150, 300
DMS3000	18" x 18" x 5.25"	100, 250
DMS4000	18" x 24" x 5.25"	250, 500, 1000
DMS5000	24" x 24" x 5.25"	250, 500, 1000
DSS4000	18" x 24" x 5.25"	250, 500, 1000
DSS5000	24" x 24" x 5.25"	250, 500, 1000

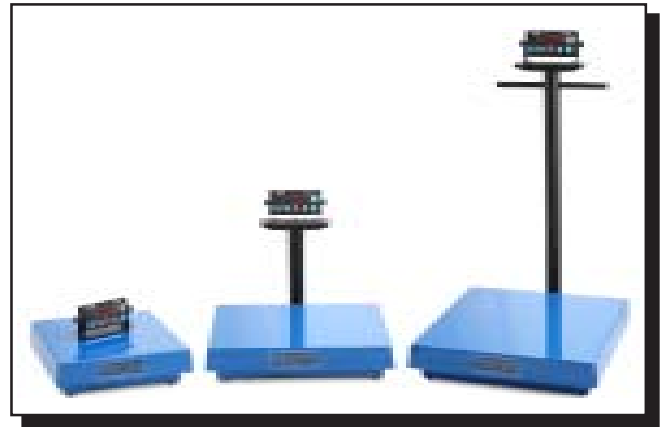


DS100 paired with DMS Series Scale Bases and columns.

SPECIFICATIONS

- Display:** 6 Digit, red LED, 0.56" High
- Controls:** ZERO, GROSS/NET, TARE, UNITS, PRINT
- Output:** Bi-directional RS-232
- Power:** 115 VAC 60Hz; Transformer, UL/ULC (230 VAC Optional)
External DC / Vehicle DC (Optional)
- Units:** lb, kg, g, oz, or lb & oz
- Construction:** Mild Steel Painted Enclosure With Black Wrinkle Finish
- Dimensions:** 4.25" h x 7.70" w x 2" d
- NTEP:** 5000d Class III
- Load Cells:** Up to 4, 350 ohm 1 or 2 Mv/v, 4 or 6 wire
- Options:** 230 VAC Operation, Column Mount with Doran Bases, RS-232 Cable
- Warranty:** One Year Parts & Labor

Specifications subject to change without notice.

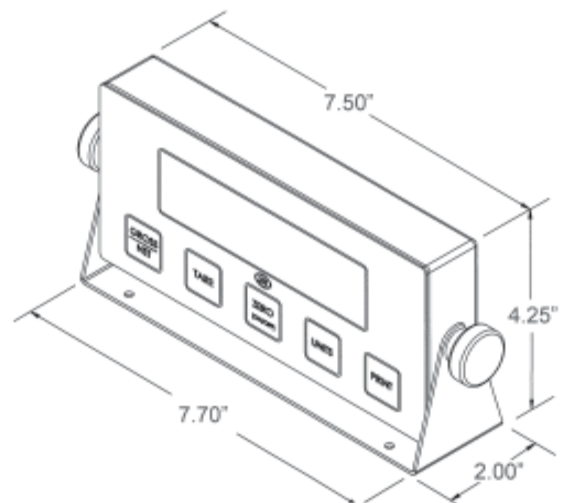

SBRC0063 03/05 Rev. 1

