


# LOAD CELL CABLES

## Top Quality Load Cell Cable by the foot or by the roll!

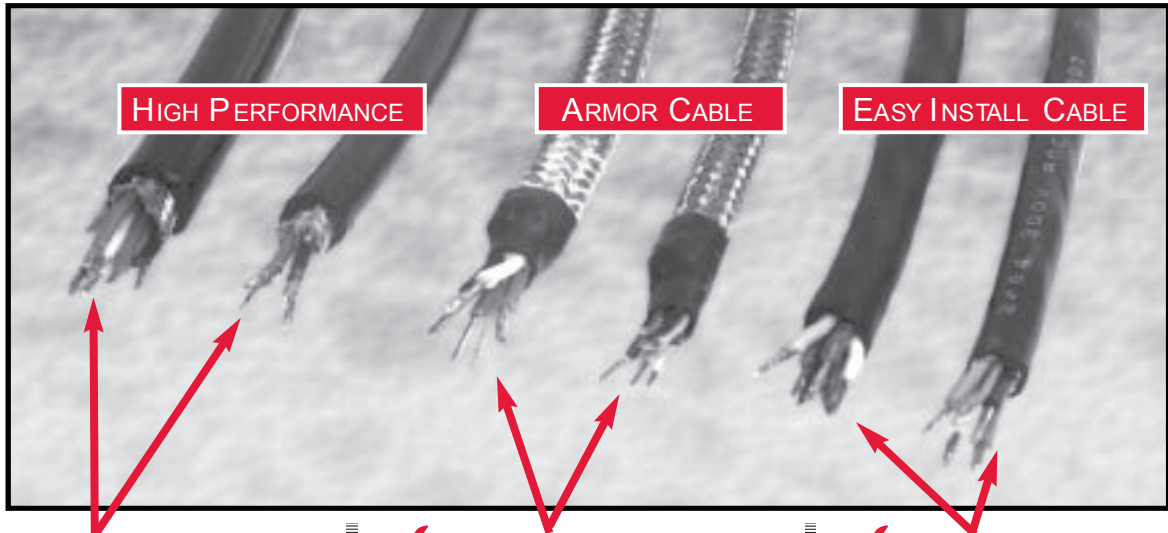

- ✓ **High performance abrasion resistant cables.**
- ✓ **Best insulation resistance.**
- ✓ **4 or 6 conductor 20 gage stranded tinned copper wiring.**
- ✓ **Individually teflon-insulated, nylon-wrapped conductors.**
- ✓ **Tinned copper sheilding with abrasion-resistant polyurethane jacket.**

- ✓ **Abrasion resistant tinned copper braid shielding.**
- ✓ **4 or 6 conductor.**
- ✓ **20 or 24 gage (AWG) stranded tinned copper wiring with vinyl insulation.**
- ✓ **Stainless steel braided armor outside.**

- ✓ **Standard cable - easy installation.**
- ✓ **4 or 6 conductor.**
- ✓ **Aluminum shield w/drain wire provides 100% shield coverage.**
- ✓ **20 gage (AWG) stranded tinned copper wiring with vinyl insulation.**



**Totalcomp**® Scales & Components

# SPECIFICATIONS

## HIGH PERFORMANCE

STOCK #	DESCRIPTION
<b>4 Conductor cable</b>	
1904	1 - 499 feet
1905	500 ft. roll
1906	1000 ft. roll
<b>6 Conductor cable</b>	
1907	1 - 499 feet
1908	500 ft. roll
1909	1000 ft. roll

## ARMOR

STOCK #	DESCRIPTION
<b>4 Conductor cable</b>	
1073	1 - 499 feet
1074	500 ft. roll
<b>6 Conductor cable</b>	
1665	1 - 499 feet
1666	500 ft. roll

## EASY INSTALL

STOCK #	DESCRIPTION
<b>4 Conductor cable</b>	
190	1 - 499 feet
241	500 ft. roll
242	1000 ft. roll
<b>6 Conductor cable</b>	
191	1 - 499 feet
244	500 ft. roll
245	1000 ft. roll

<i>Cables are available in 20 or 24 gage 4 or 6 cond, or 24 gage 6 cond.</i>			
	<b>4 Cond. -20 gage</b>	<b>4 Cond.-24 gage</b>	<b>6 Cond. -24 gage</b>
<b>Wire</b>	90% Tinned Copper Braid Shield	90% Tinned Copper Braid Shield	90% Tinned Copper Braid Shield
<b>Insulation</b>	Polyethylene	PVC-nylon	PVC
<b>Outside</b>	Stainless Steel	Stainless Steel	Stainless Steel
<b>Jacket</b>	Black Polyurethane	Grey Polyurethane	Grey PVC
<b>OD</b>	0.295 inches	0.190 inches	0.220 inches
<b>Lengths</b>	specify	specify	specify

### TOTALCOMP LIMITED WARRANTY

*Totalcomp* warrants this product to be free of defects in materials and/or workmanship and suitable for the purpose(s) intended as outlined on this sheet. This warranty is effective and shall cover the purchaser for one year from the date of shipment from our plant. If this product is found to be defective by our inspection in accordance with the above listed criteria, we will replace or repair it at our expense. For warranty service, please obtain a return authorization number from us and return the item, shipping prepaid, with a written description of the problem. We will respond promptly with the results of our evaluation.

