

EXPLOSION-PROOF REMOTE DISPLAY



Model TSR-0.4L-EXP

State-of-the-art remote display for use in volatile environments

Smart Remote

- ✓ **Bright LED display for optimum indoor use.**
- ✓ **Up to 9,600 baud.**
- ✓ **Smart Remote display provides simple set-up.**


Explosion Proof

- ✓ **NEMA 4X rated enclosure with neoprene gasket for watertight applications.**
- ✓ **Corrosion resistant, copper-free aluminum construction.**

 **Totalcomp**[®] Scales & Components

SPECIFICATIONS

Totalcomp model TSR-0.4L-EXP

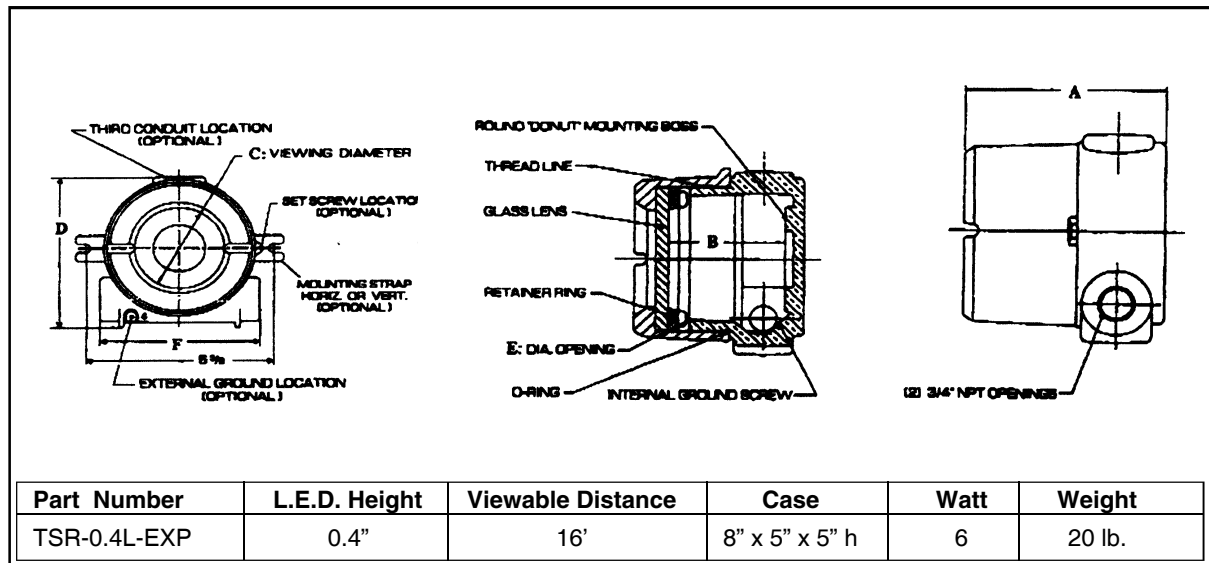

Totalcomp model TSR-0.4L-EXP

The Totalcomp TSR-0.4L-EXP provides a safe L.E.D. display inside an Explosion proof enclosure. This enclosure is meant to provide protection when utilizing a display inside a volatile environment. Including environments where flammable gases, vapors and mists, and ignitable dusts fibers and flyings are present.

The Smart Remote Display is easily set-up. Simply connect the signal wires, press the "Learn" button and the Smart Remote will begin the set-up automatically.

Class I, Group A: acetylene

Class I, Group B: hydrogen

Class I, Group C: ethylene

Class I, Group D: propane

Class II, Group E: metal dust

Class II, Group F: carbon dust

Class II, Group G: flour, starch, grain

Class III: fibers and flyings

TOTALCOMP LIMITED WARRANTY

Totalcomp warrants this products to be free of defects in materials and/or workmanship and suitable for the purpose(s) intended as outlined on this sheet. This warranty is effective and shall cover the purchaser for one year from the date of shipment from our plant. If this product is found to be defective by our inspection in accordance with the above listed criteria, we will replace or repair it at our expense. For warranty service, please obtain a return authorization number from us and return the item, shipping prepaid, with a written description of the problem. We will respond promptly with the results of our evaluation.