# TWP-W

wireless transmitter

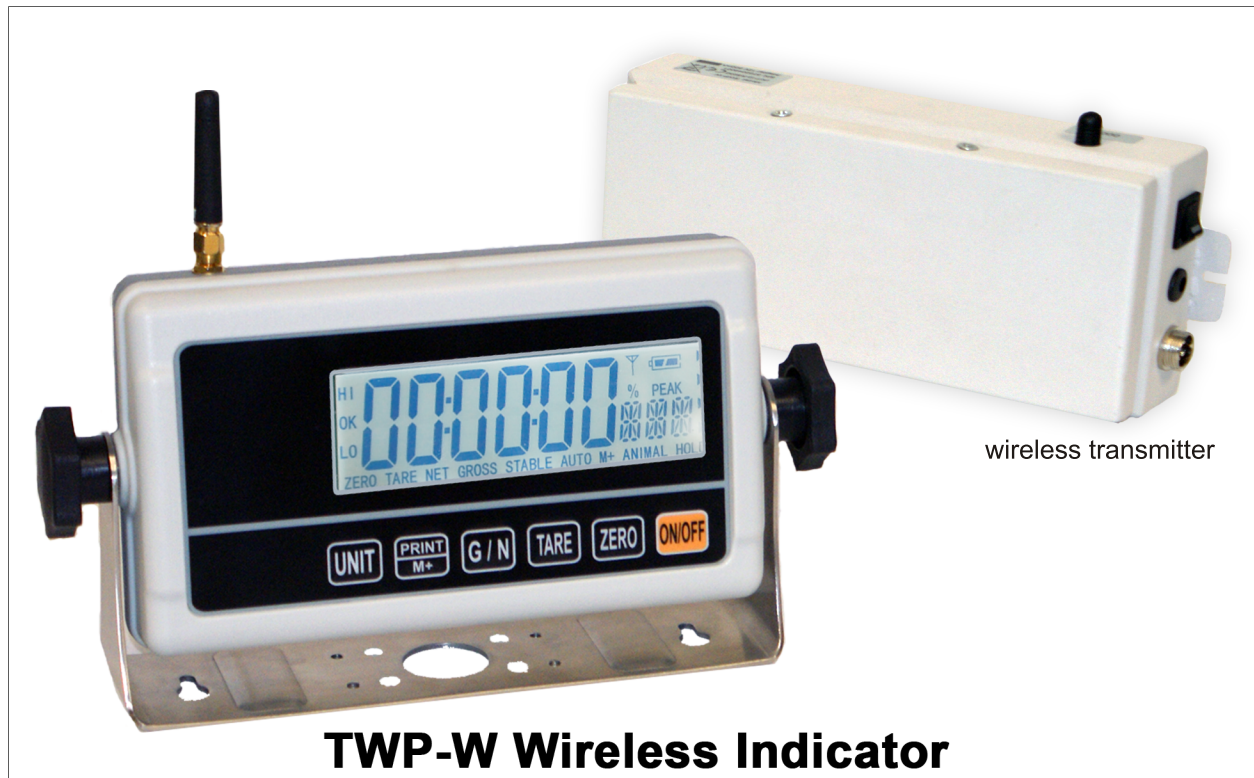## TWP-W Wireless Indicator

# An economical general purpose indicator for a variety of weighing applications

✓ **Wireless communication distance up to 290 ft or 100 meters.**

✓ **Communication frequency is 433mhz**

✓ **RS-232 - connects to a mini printer, label printer, or computer**

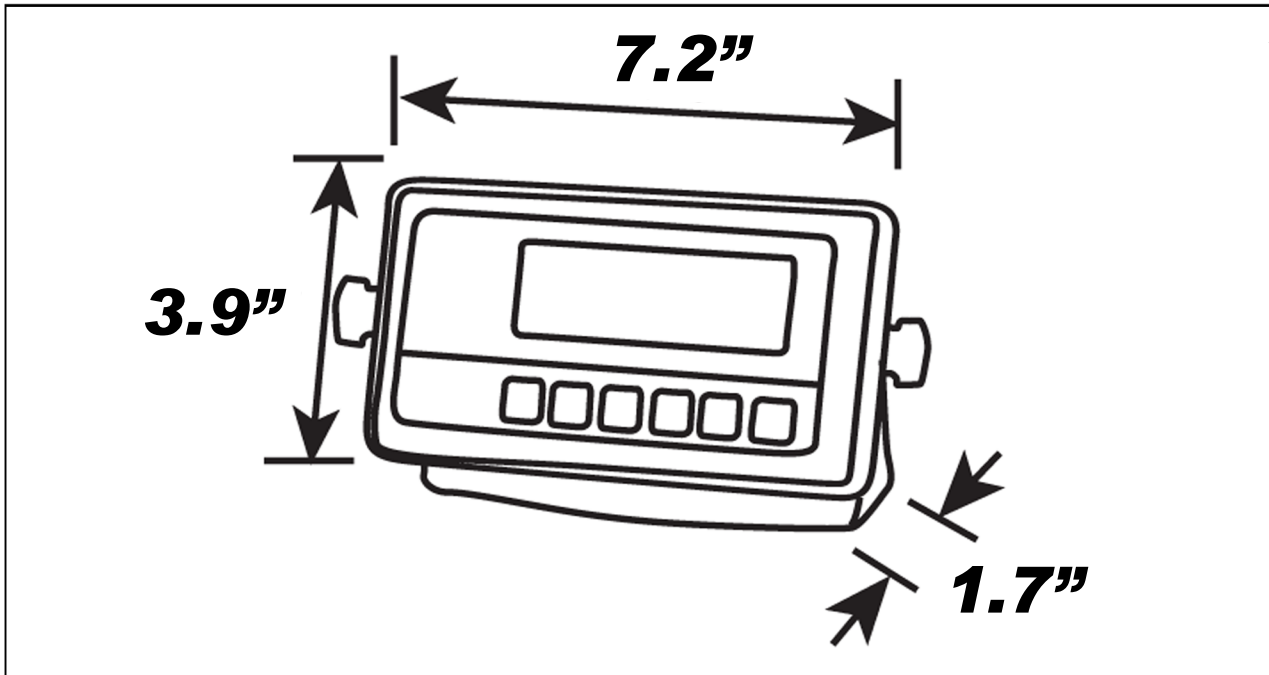✓ **Rechargable Battery provides up to 35hrs of continuous use.**



# Totalcomp®
## Scales & Components

# TWP-W

# *TWP-W Indicator*



## Features:

ABS plastic enclosure. Digital weight indicator with 6 digit, 0.8" high LCD display with backlit LCD display. 6 mechanical switch keys. Applications for: Check Weighing, Peak Hold, Accumulation, Over/Under, Animal Weighing. Units for: lb, kg, g, oz, tj, hj. Internal counts: 600,000. Rechargeable battery provides up to 35 hours of continuous use. RS232 serial port. 115 VAC, 12VDC/500mA AC adapter. Max div 30,000.

## Specifications:

| | |
|---|---|
| Load cell: | 5VDC, 150ma (4) 350 ohm load cells |
| Analog input: | 2.5 uV/div |
| Conversion: | Update max 60 times per sec 1, 2, 5, 10, 20, 50 |
| Accuracy: | 0.01% full scale |
| Output: | RS-232, baud 600, 1200, 2400 |
| Keys: | UNIT, PRINT/M+, G/N, TARE, ZERO, ON/OFF |
| Annunciators: | lb, kg, g, oz, tj, hj, mt, hi, ok, lo, %, Peak, Battery, Hold, Stable, Auto, Animal, Zero, Tare, Net, Gross |
| Display: | 6 digit, 0.8" high LCD with backlight |
| Power: | 115 VAC adapter/rechargeable battery |

# Totalcomp®

## *Scales & Components*