

Pinnacle[®] Conveyor

Stockpile 25% More Material

Guaranteed Durability

Pound for pound and dollar for dollar, you can't find another brand that will last longer.



Volume Boost



Setback axle and 22° incline (standard is 18°) allows more room for stockpiled material.



STOP

Burying The Axle

Fastest Changeover



Patented FD Axle allows the world's fastest changeover from transport to stockpile mode.



Local

Dealer Support



5-year

Structural Warranty

Material Protection



Patented power fold system protects hydraulic cylinders from damaging contaminants.

First-Class Service

We have a fundamental belief in maintaining long-term relationships with our customers.

Maximum Stockpile Volume

50,000


Tons



Featured Superior Brand Conveyor Accessory:


Slick and greasy, Urathon[®] Return Rolls are turned off by clingy material, constantly shedding it to prevent buildup and protect a belt's integrity.

Stockpile Dimensions

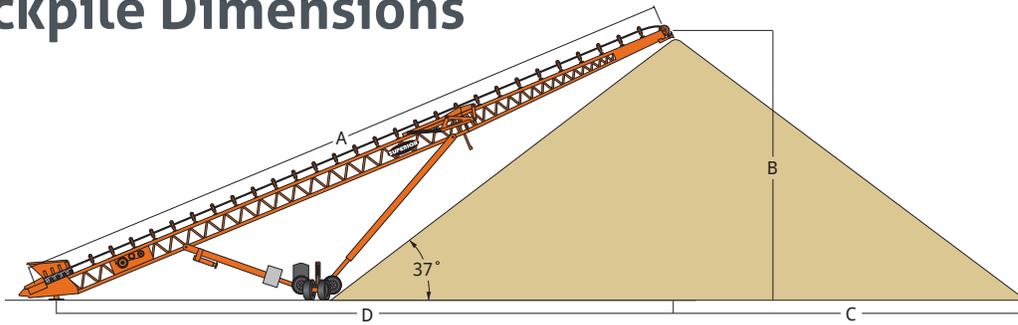


Conveyor Length	A	80'	100'	125'
Stockpile Height	B	31' 7"	38' 8"	49' 8"
Radius of Pile	C	42' 2"	51' 7"	66' 5"
Anchor Pivot to Center of Pile	D	74' 6"	93' 0"	114' 7"

Operating Dimensions

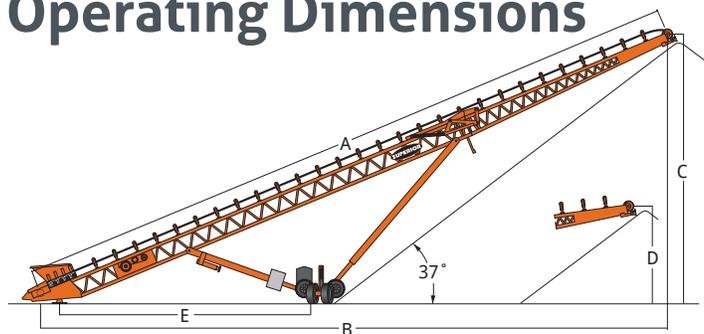

Conveyor Length	A	80'	100'	125'
Conveyor Ground Length	B	72' 3"	91' 0"	116' 4"
Raised Height to Center of Pulley	C	32' 5"	39' 4"	50' 8"
Lowered Height to Center of Pulley	D	18' 1"	20' 1"	18' 2"
Anchor Pivot to Center of Axle	E	32' 2"	39' 8"	46' 5"

Transport Dimensions

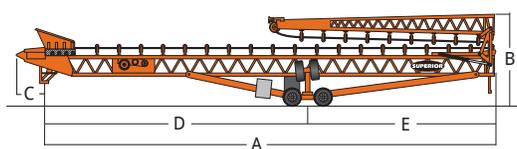

Conveyor Length		80'	100'	125'
Travel Length	A	53' 7"	68' 8"	84' 2"
Travel Height	B	13' 5"	13' 2"	13' 11"
Tail to Kingpin	C	5' 1"	5' 0"	5' 6"
Kingpin to Axle	D	34' 7"	39' 7"	49' 4"
Axle to Head	E	19' 0"	29' 1"	34' 10"
Weight at Axle (lbs.)	-	28,000	34,000	49,000