


Series 767

Bidirectional High Pressure Slurry Valve

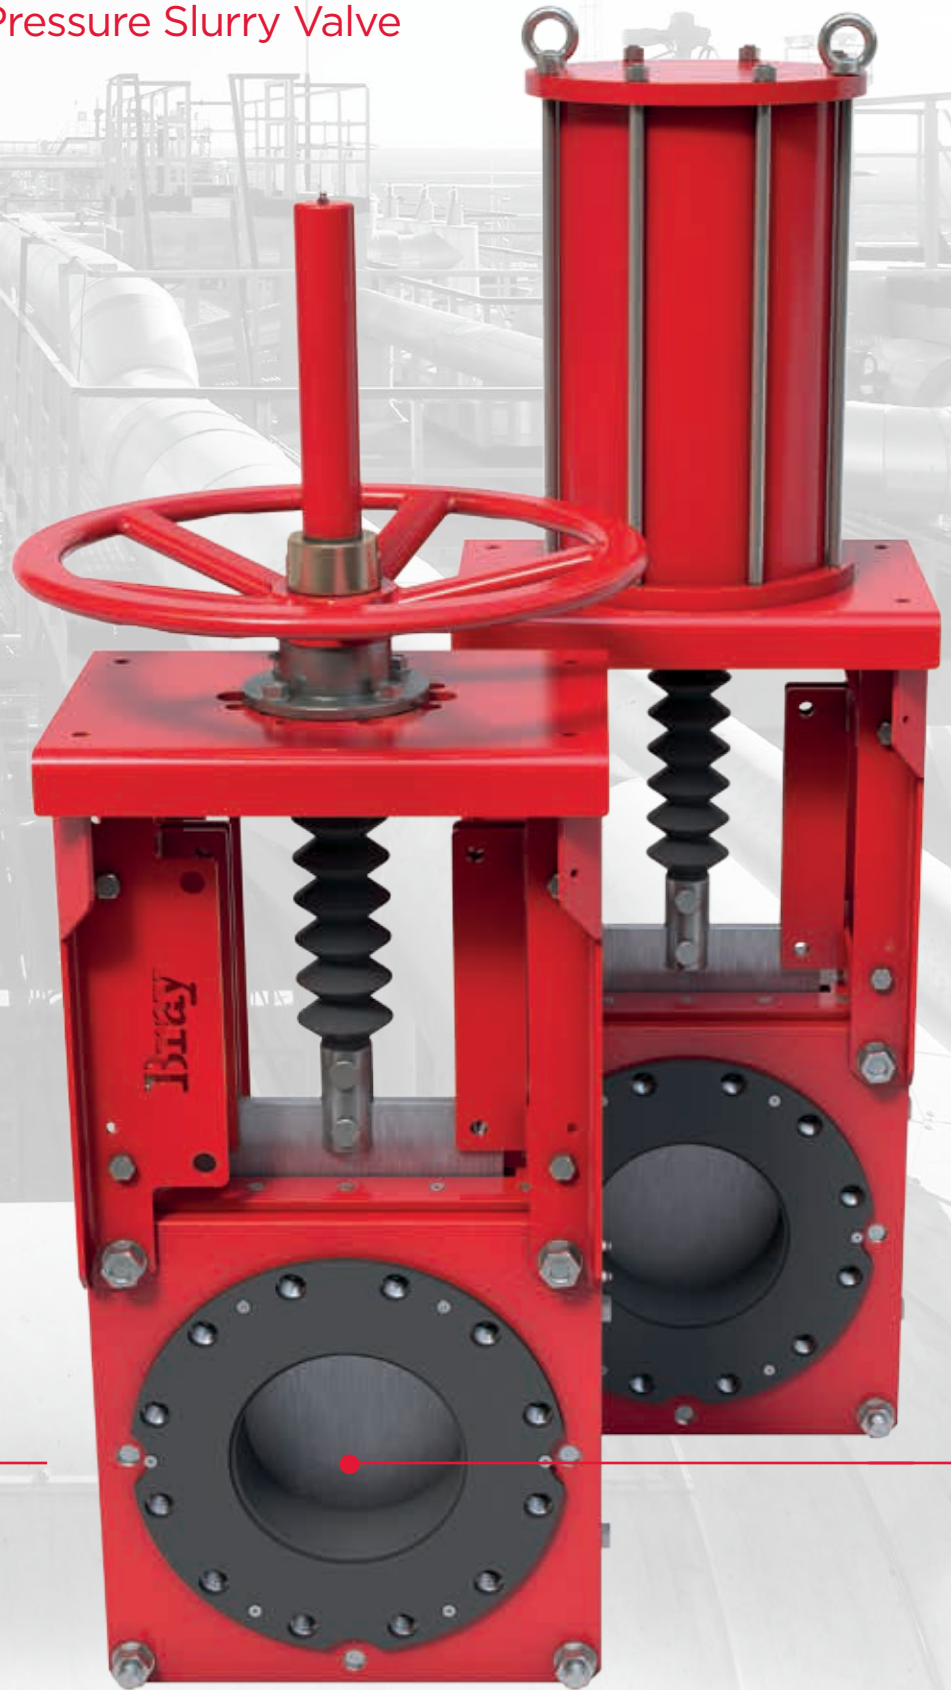

Bray / VAAS

3"-36" (80-900mm) 725psi (50bar)


Series 767

Bidirectional High Pressure Slurry Valve

The Bray/VAAS Series 767 is a bidirectional high pressure slurry valve, designed for demanding high pressure slurry applications. Twin elastomer seats and push-through gate design facilitate self-cleaning and prevent media build up.

The durable ductile iron body is offered in a two-piece bolted wafer style. When fully open, the valve is full bore, offering no resistance to line media.

- 1 Protective stem cover is standard increasing cycle life in hazardous environments.
- 2 J-ring steel-reinforced, elastomer sleeves provide energized, zero leakage shutoff in both directions. Retaining rings included as standard throughout the entire size range.
- 3 In the open position, the energized sleeves shield all metal components from direct contact with the flowing process media.
- 4 Robust gate available in a wide range of corrosion resistant alloys to suit the application.
- 5 Full port design provides unobstructed flow path, extending sleeve life and minimizing pressure drop across valve.
- 6 Ample clearance for push-through allows complete gate closure.
- 7 Two-piece bolted wafer body allows for easy maintenance and is drilled and tapped to ASME CL150 flange patterns as standard. Other drilling options available upon request.
- 8 Bottom flush plate with tapped ports provided as standard, allowing for safe discharge of media and easy flush water connection.

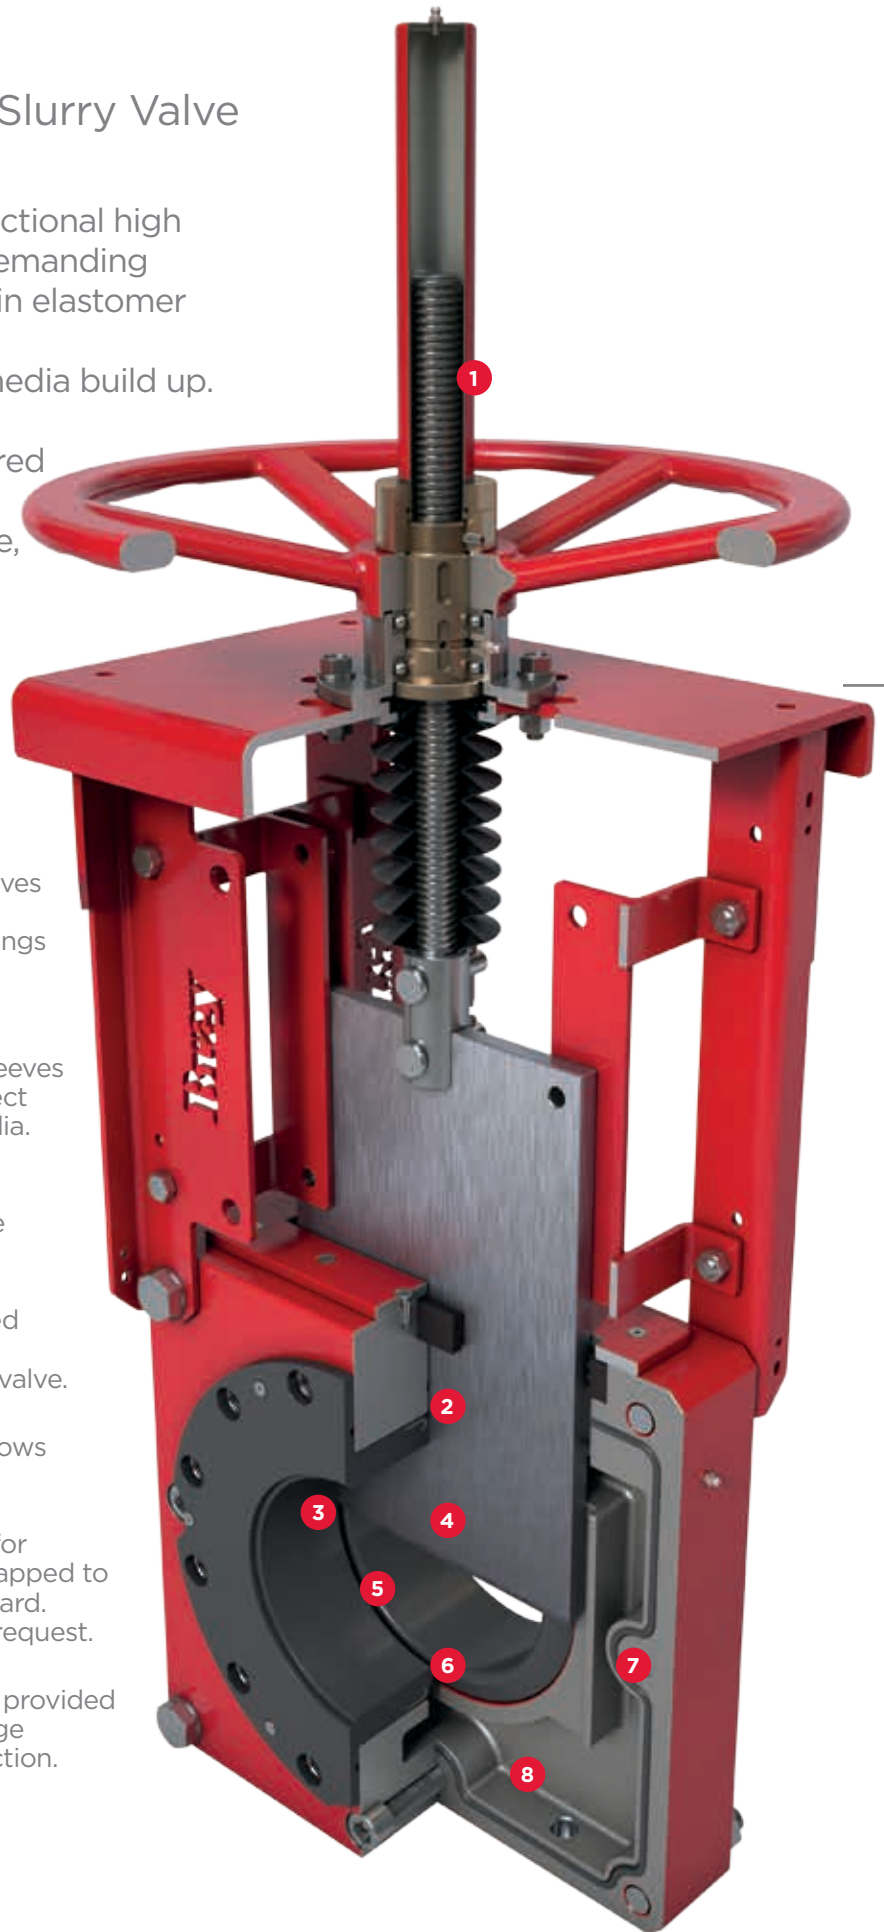

Standard Construction

Body	Gate	Seat	Stem	Wiper Support	Wiper	Topworks
DI	316	Nat. Rubber	304	CS	EPDM	Steel
CF8M	316	Nat. Rubber	304	CS	EPDM	Steel

Actuator Options*

Bevel Gear	Standard 10"-24"
Pneumatic	
Hydraulic	
Electric	

*Direct Mounted Handwheel (Standard 2"-8").

Body Options

Carbon Steel (WCB)
CF8 Stainless Steel
CF8M Stainless Steel
CF3M Stainless Steel
SAF 2205 Duplex
SAF 2507 Duplex

Gate Options

304, 316, 317 Stainless Steel
SAF 2507 Duplex
17-4PH Stainless Steel
Hastelloy® C
Monel®
Titanium

Seat Options

Nat. Rubber* -60°-165°F/-51°-74°C
Buna-N -35°-194°F/-37°-90°C
EPDM -65°-248°F/-54°-120°C
Viton® -15°-392°F/-26°-200°C

Additional material options may be available upon request. Consult factory for availability.

*Shore hardness: 60.

Specifications & Standards

Size Range	3" to 36" (80 - 900mm)
Pressure Rating	725psi (50bar)
Body Style	Wafer, two-piece bolted

Design	Manufacturer Standard
Testing	MSS SP-81
Face-to-face	Per industry standard
Certification	Canadian CRN
Drilling*	ASME B16.5 CL150, ASME B16.47 CL150

Dimensions

In. (mm)	A	B	C	D	E	F	G	ØH	ØJ	K	L
3 (80)	10.47 (266)	6.88 (175)	5.23 (133)	19.68 (500)	22.79 (579)	16.06 (408)	11.81 (300)	2.40 (61)	2.79 (71)	16.61 (422)	16.61 (422)
4 (100)	11.73 (298)	7.12 (181)	5.90 (150)	27.24 (692)	22.26 (718)	30.23 (768)	11.81 (300)	3.34 (85)	3.85 (98)	17.67 (449)	17.67 (449)
6 (150)	14.25 (362)	7.24 (184)	7.24 (184)	33.54 (852)	36.53 (928)	30.55 (776)	19.68 (500)	5.74 (146)	5.82 (148)	18.74 (476)	18.74 (476)
8 (200)	16.73 (425)	7.24 (184)	8.46 (215)	39.52 (1004)	40.66 (1033)	39.13 (994)	19.68 (500)	7.32 (186)	7.83 (199)	23.85 (606)	23.85 (606)
10 (250)	19.48 (495)	8.89 (226)	9.84 (250)	--	47.51 (1207)	47.12 (1197)	23.62 (600)	9.09 (231)	9.76 (248)	25.59 (650)	25.59 (650)
12 (300)	21.96 (558)	9.52 (242)	10.98 (279)	--	53.54 (1360)	51.18 (1300)	23.62 (600)	10.74 (273)	11.45 (291)	25.59 (650)	25.59 (650)
14 (350)	26.49 (673)	9.88 (251)	13.85 (352)	--	60.59 (1539)	55.11 (1400)	23.62 (600)	12.48 (317)	13.26 (337)	25.59 (650)	25.59 (650)
16 (400)	32.48 (825)	11.26 (286)	15.47 (393)	--	66.53 (1690)	64.96 (1650)	27.55 (700)	14.21 (361)	14.72 (374)	26.57 (675)	26.57 (675)
18 (450)	34.72 (882)	12.24 (311)	16.49 (419)	--	70.74 (1797)	75.74 (1924)	27.55 (700)	15.00 (381)	16.96 (431)	26.57 (675)	26.57 (675)
20 (500)	37.24 (946)	14.68 (373)	17.71 (450)	--	80.15 (2036)	78.46 (1993)	27.55 (700)	16.57 (421)	18.46 (469)	30.70 (780)	30.70 (780)
24 (600)	44.48 (1130)	14.68 (373)	21.49 (546)	--	89.33 (2269)	89.33 (2269)	27.55 (700)	21.18 (538)	22.67 (576)	30.70 (780)	30.70 (780)
30 (750)	55.12 (1400)	16.33 (415)	26.02 (661)	--	--	--	27.55 (700)	26.77 (680)	29.13 (740)	--	--
36 (900)	56.10 (1425)	18.50 (470)	28.14 (715)	--	--	--	27.55 (700)	31.88 (810)	35.03 (890)	--	--


Dimensions given above are indicative. Please request certified drawings for piping layout.

Weights

Size (In.)	3	4	6	8	10	12	14	16	18	20	24	30	36
Weight (lbs)	50	60	70	90	120	150	200	240	350	420	500	1000	1700
Size (mm)	80	100	150	200	250	300	350	400	450	500	600	750	900
Weight (kgs)	23	30	45	64	90	170	200	240	260	330	480	976	976

*Weight shown with pneumatic actuator standard.

*Additional drilling options available. Consult factory for availability.

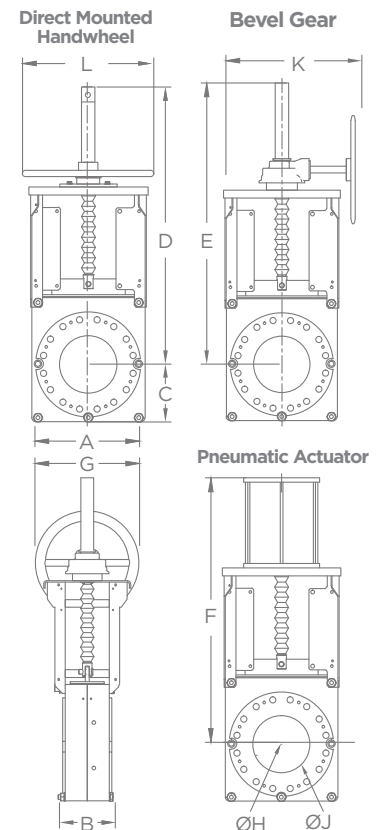

Consult factory for hydraulic and electric actuators dimensions.